сов вѕм с

COBALT Tap Range Cobalt Bath Shower Mixer Chrome



Features:


- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Also available in other finishes.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

Product Certifications:



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	3/4"BSP			
Connection Outlet:	Anti-Splash			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

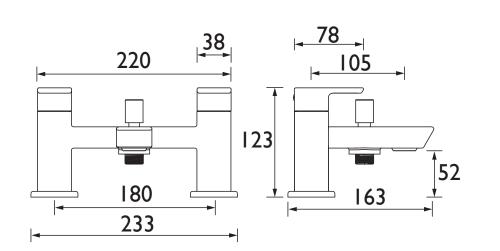

For more products, visit our website: http://www.bristan.com	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
	Through Bath Filler (mixed)	25.8	40.8	57.7	81.6	99.9	129	
回時時間	Through Handset (mixed)	4.3	6.8	9.6	13.6	16.7	21.6	
TECHNICAL DATA SHEET	PEARS LES +		B	RIS	ST/	AN		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.