FRZ BSM C

FRENZY Tap Range Frenzy Bath Shower Mixer Chrome



Features:

- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

Product Certifications:



WRAS Certificate No: 2003042 WRAS Expiry Date: 31/03/2025






For more products, visit our website: http://www.bristan.com



| Specification | | | | |
|-----------------------------------|-----------------------------------|--|--|--|
| Product Type: | Bathroom Tap | | | |
| Main Construction Material: | Brass | | | |
| Mount Type: | Deck Mounted | | | |
| Handle Type: | Lever Handles | | | |
| Connection Inlet: | G3/4" | | | |
| Connection Outlet: | M28 Flow Straightener | | | |
| Number of Tap Holes: | 2 | | | |
| Valve/Cartridge Type: | 1/4 Turn 3/4" Ceramic Disc Valve | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | |
| Minimum Dynamic Pressure (bar): | 0.3 bar | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | |
| Maximum Static Pressure (bar): | 10 bar | | | |
| Flow Type: | Single Flow | | | |
| Isolation Included: | No | | | |

Dimensions (measurements in mm)

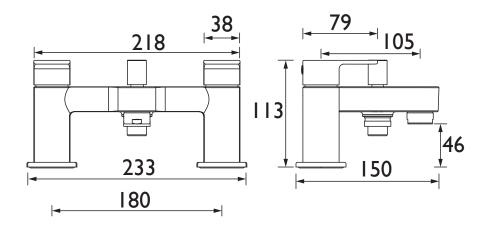

| Flow Rates (I/min) | | | | | | | | |
|-----------------------------|------|------|------|------|------|------|--|--|
| System Pressure (bar) | 0.3 | 0.5 | 1 | 2 | 3 | 5 | | |
| Through Bath Filler (mixed) | 11.2 | 14.5 | 20.4 | 28.9 | 35.4 | 45.7 | | |
| Through Handset (mixed) | 4.9 | 6.3 | 8.9 | 12.6 | 15.4 | 19.9 | | |

TECHNICAL DATA SHEET



