
BS1 C



Product Type:BatMain Construction Material:Bra	hroom Tap
Main Construction Material: Bra	
	SS
Mount Type: Wa	II
Handle Type: N/A	A
Connection Inlet: 3/4	" BSP
Connection Outlet: M28	8 Flow Straightener
Number of Tap Holes: 1	
Valve/Cartridge Type: N/A	A
Plumbing System Requirements: Suit	table for all plumbing systems
Working Pressure Range: Min	. 0.2 bar, Max. 5.0 bar
Maximum Hot Water Temperature: °C 60	
Maximum Static Pressure: (bar) 10	
Flow Type: Sing	gle
Isolation Included: No	

Features:

- G3/4" inlet connection
- Wall mounted
- For use with Side Bodies or showers with diverters

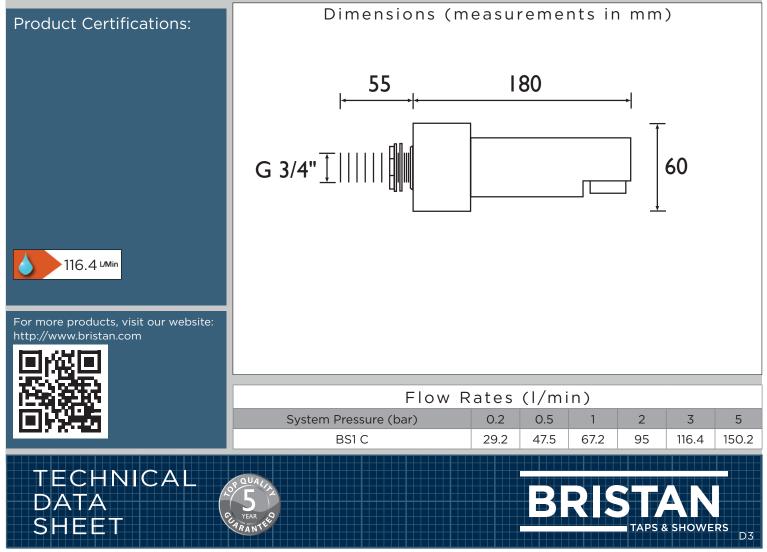

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.