




Features:

- 15mm inlet connection
- 15mm outlet connection
- Requires minimum cavity depth of 65mm
- High performance even at low pressures
- Can be used to control flow of mixed water to outlets, or as hot / cold flow controls feeding outlets

Product Certifications:


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Single Control
Valve/Cartridge Type:	Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Minimum Dynamic Pressure:	0.2 bar
Connection Inlet:	15mm Compression Connections
Connection Outlet:	15mm Compression Connections
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

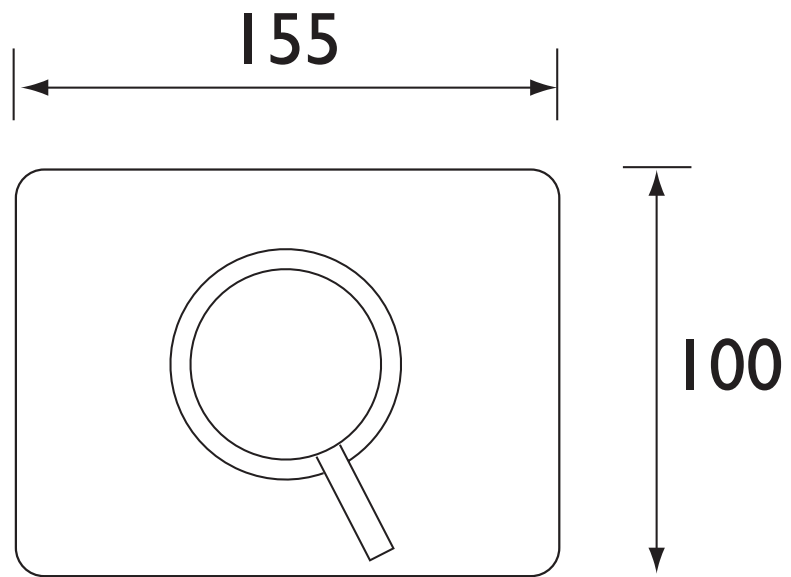

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	6.7	10.3	14.4	20.1	24.6	32.1

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3