

# Z L 1/2 C

## SELF CLOSE Tap Range


Single Timed Flow Toggle Control  
Basin Pillar Tap 6lpm Chrome



### Features:

- Approx. 15 second shut off
- Supplied with both hot and cold indices
- Supplied with 6 L/min flow regulator fitted
- Supplied with cold and hot indices for flexibility


### Product Certifications:



Kiwa Certificate No: 2504745  
Kiwa Expiry Date: 30/04/2030




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Commercial Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Toggle
Connection Inlet:	1/2" BSP
Connection Outlet:	N/A
Number of Tap Holes:	1
Valve/Cartridge Type:	Automatic Shut-Off Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	3 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Isolation Included:	No

### Dimensions (measurements in mm)

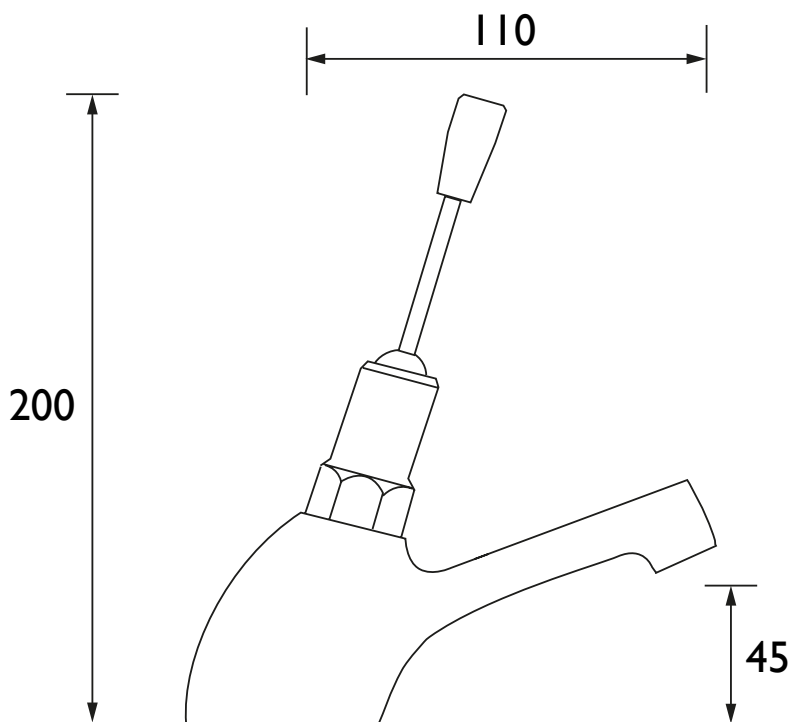

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3
With Flow Regulators	1.3	3.3	4.8	5.6	6.3
Without Flow Regulators	8.5	14.1	20.4	29	35.6

## TECHNICAL DATA SHEET



# BRISTAN

D7