## QD SHXSMFF C

# QUADRATO Shower Range Quadrato Exposed Bar Shower with Kit



#### Features:

- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar showers, using built in front-of-wall isolation valves.
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-ridden to a maximum of 46°C
- Dual control flow and temperature are controlled separately
- Automatic shut-off in the event of hot or cold water supply failure
- 15mm inlet connections

#### **Product Certifications:**



WRAS Certificate No: 2211901 WRAS Expiry Date: 30/11/2027






For more products, visit our website: <a href="http://www.bristan.com">http://www.bristan.com</a>



Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Bar Shower				
Shower Head Type:	Multi-Function Handset				
Shower Kit:	Adjustable Riser				
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn				
Maximum Hot Water Supply Temperature °C:	65				
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.3				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	Yes				
Check Valve Included:	Yes				

### Dimensions (measurements in mm)

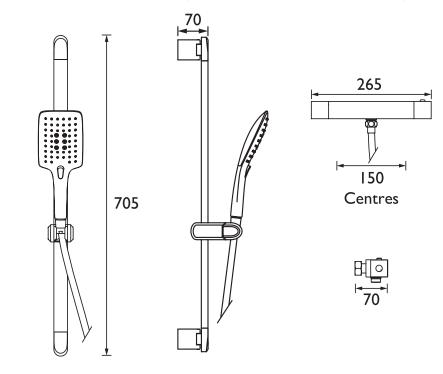

Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
Through Handset (mixed)	3.2	4.1	5.8	8.2	10	12.9		

TECHNICAL DATA SHEET



BRISTAN