## NR BSM E8 C




## Features:

- Metal handles
- 1.5m Hose
- Wall bracket
- 8 I per min flow regulator

**Product Certifications:** 

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck mounted			
Handle Type:	Lever Handles			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Flow Regulator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

## Dimensions (measurements in mm)

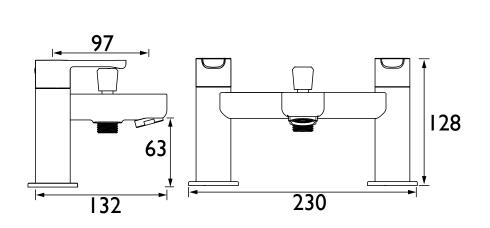

For more products, visit our website:

8

l/min



TECHNI

DATA

\$

Water Label

	Flow Rates (I/min)									
	System Pressure (bar)	0.2	0.5	1	2	3	5			
	Through Bath Filler (mixed)	4.1	35.1	49.6	70.1	85.9	110.9			
	Through Handset (mixed)	8	8	8	8	8	8			
CAL	PQUALIT PQUALIT									

BRISIA

D2

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.