SAIL Tap Range Sail Basin Mixer Chrome

Specification

Taps

Brass

1

0.2 bar

5 bar

65°C

10 bar

Dimensions (measurements in mm)

No

Single Flow

Deck Mounted

Lever Handle

M10 x 15mm Flexible Tails

35mm Ceramic Cartridge

Suitable for all plumbing systems

50

47

2

5.00

GI '⁄/"

3

5.00

5

5.00

D11

M24 5lpm Flow Limiter


SAI BAS C



Features:

- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:

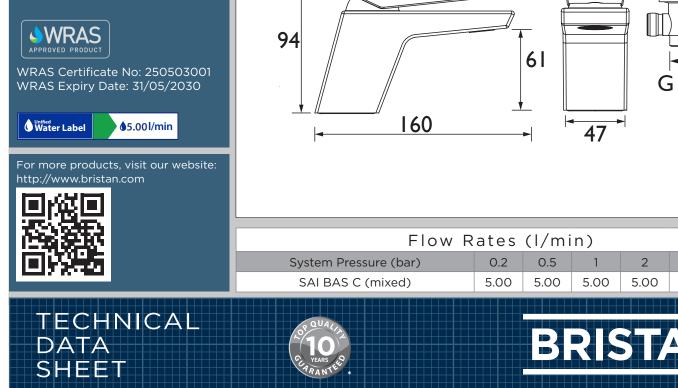

Product Type:

Mount Type: Handle Type:

Flow Type:

Isolation Included:

Connection Inlet:

Connection Outlet:

Number of Tap Holes:

Valve/Cartridge Type:

Plumbing System Requirements:

Minimum Dynamic Pressure (bar):

Maximum Dynamic Pressure (bar):

Maximum Static Pressure (bar):

Maximum Hot Water Temperature °C:

105

135

Main Construction Material:

Bristan, Birch Coppice Business Park, Dord	on, Tamworth,	B78 1SG. Web Site	www.bristan.com	Telephone: 0330	026 6273. Email:	enquire@bristan.co
* 10 ·····			Allen alenande and	design for the second second	7	the state finite in the state

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.