

CLR SHXDIVFF C

CLARET Shower Range Claret Thermostatic Exposed Bar Valve with Rigid Riser and Integral Diverter to Handset Chrome



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Dual control - flow and temperature are controlled separately
- Automatic shut-off in the event of hot or cold water supply failure
- Supplied with a wall mount 12 fixing kit for easier first fit

Product Certifications:



WRAS Certificate No.: 2203902
WRAS Expiry Date: 31/03/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Bar
Shower Head Type:	Handset and Fixed Head
Valve/Cartridge Type:	30mm Single Lever Cartridge
Maximum Hot Water Supply Temperature °C:	80
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure:	0.5 bar
Maximum Dynamic Pressure:	5.0 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G1/2" and Riser Outlet
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

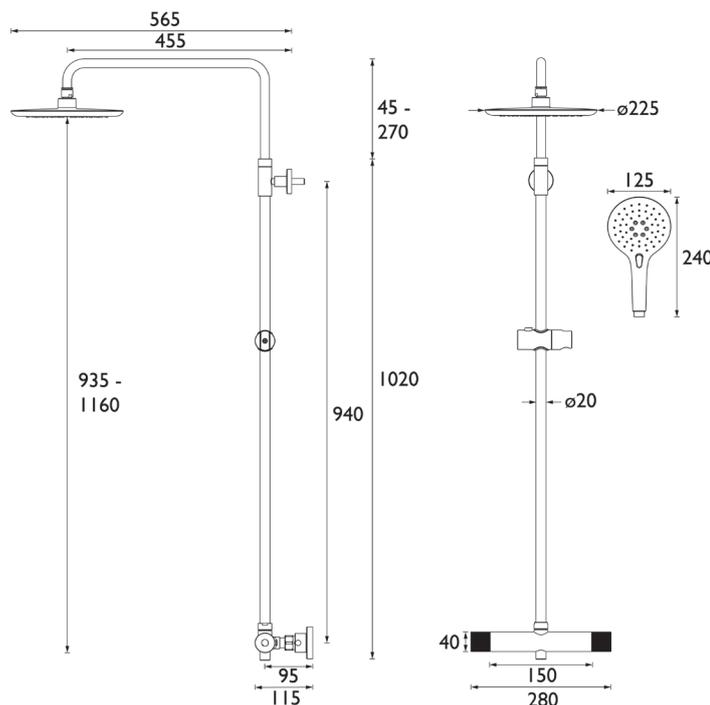

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Through Handset (mixed)	3.7	5.2	7.3	9	11.6
Through Fixed Head (mixed)	6.2	8.8	12.4	15.2	19.6

TECHNICAL
DATA
SHEET



BRISTAN

D6