

# Z2 DUS 1/2 C

## COMMERCIAL Tap Range

Single Pillar Basin Soft Touch Timed  
Flow Tap Chrome



### Features:

- Timed shut off to meet BS EN 816
- Soft touch easy to use mechanism
- Supplied with both hot and cold indices
- Supplied with 5 L/min flow regulator
- Operates at a minimum pressure of 0.5 bar

### Product Certifications:



WRAS Certificate No: 241003013  
WRAS Expiry Date: 31/10/2029




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Push Handle
Connection Inlet:	1/2" BSP
Connection Outlet:	Open
Number of Tap Holes:	1
Valve/Cartridge Type:	Self Closing Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.5
Maximum Dynamic Pressure (bar):	5.0
Maximum Hot Water Temperature °C:	60
Maximum Static Pressure (bar):	10
Flow Type:	Single Flow
Isolation Included:	No

### Dimensions (measurements in mm)

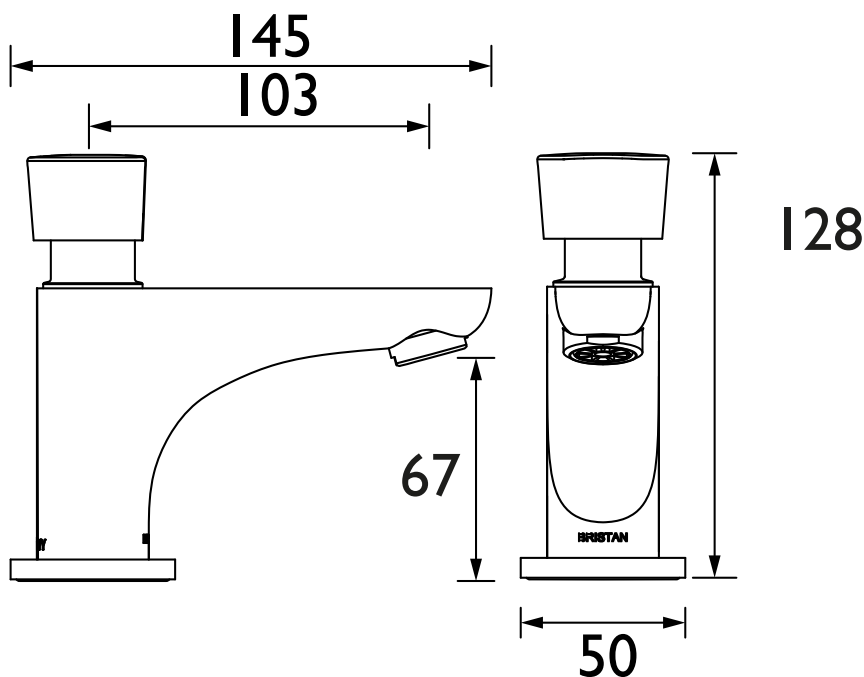

### Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Z2 DUL 1/2 C	15.2	21.5	30.5	37.3	48.2

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D15