

# Z2 LUX 1/2 C

## COMMERCIAL Tap Range

Single Luxury Soft Touch Timed Flow  
Basin Tap Chrome



### Features:

- Timed shut off to meet BS EN 816
- Soft touch easy to use mechanism
- Supplied with both hot and cold indices
- Supplied with 5 L/min flow regulator
- Operates at a minimum pressure of 0.5 bar

### Product Certifications:



WRAS Cert. Number: 241003013  
WRAS Expiry Date: 31/10/2029




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Push Button
Connection Inlet:	1/2" BSP
Connection Outlet:	Open
Number of Tap Holes:	1
Valve/Cartridge Type:	Self Closing Valve
Plumbing System Requirements:	All - Ideally Balanced
Minimum Dynamic Pressure:	0.5 Bar
Maximum Hot Water Temperature: °C	60
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

### Dimensions (measurements in mm)

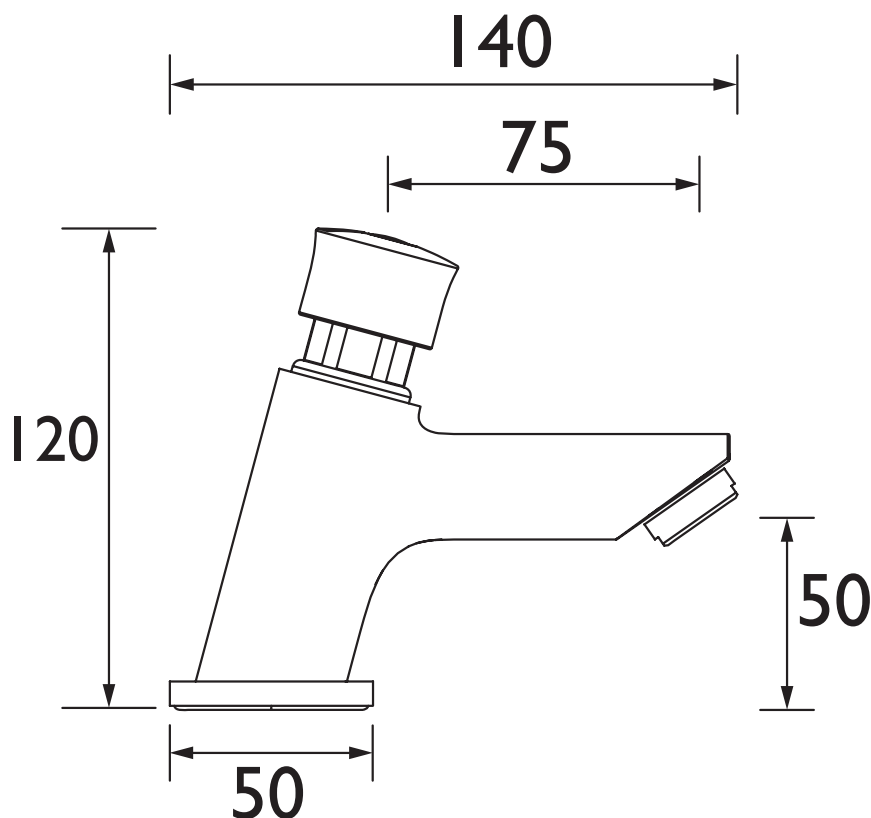

### Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Z2 LUX 1/2 C	15	21.2	30	36.7	47.4

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D13