## **1901 Tap Range** 1901 Bath Shower Mixer with Ceramic Disc Valves Chrome

## N BSM C CD



## Features:


- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

Product Certifications:						
Water Label	♦ 27.5 <sub>l/min</sub>					

For more products, visit our website: http://www.bristan.com

Specification				
Product Type:	Тарѕ			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Crosshead			
Connection Inlet:	3/4" BSP			
Connection Outlet:	N/A			
Number of Tap Holes:	2			
Valve/Cartridge Type:	Manual			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

## Dimensions (measurements in mm)

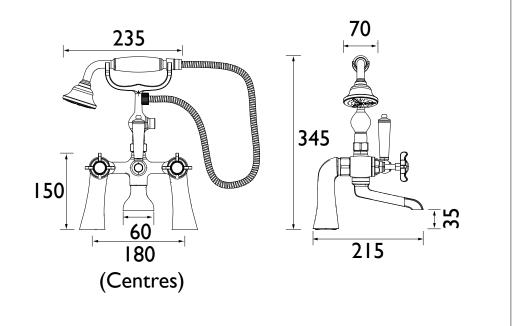

D6

	Flow Rates (l/min)System Pressure (bar)0.20.51Through Bath Filler (mixed)23.238.754.7Through Handset (mixed)7.111.215.9					3 82 27.5	5 122.4 35.5
TECHNICAL DATA SHEET			B	RIS	22.5		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.