

SAIL SHWR PK

SAIL Shower Range

Complete Sail Recessed Dual Control Shower Pack



Features:

- All in one box - pack includes shower valve with slimline 200mm round drench head and shower arm so nothing to buy separately
- Rub clean drench head - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish
- Thermostatic cartridge with preset temperature safety stop at 42°C for family-safe showering. A higher temperature can be selected, if required, by selecting the override function.
- Dual control - Flow and temperature are operated separately giving accurate control of both.

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	00 Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Fixed Head
Shower Kit:	N/A
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	N
Check Valve Included:	Y

Dimensions (measurements in mm)

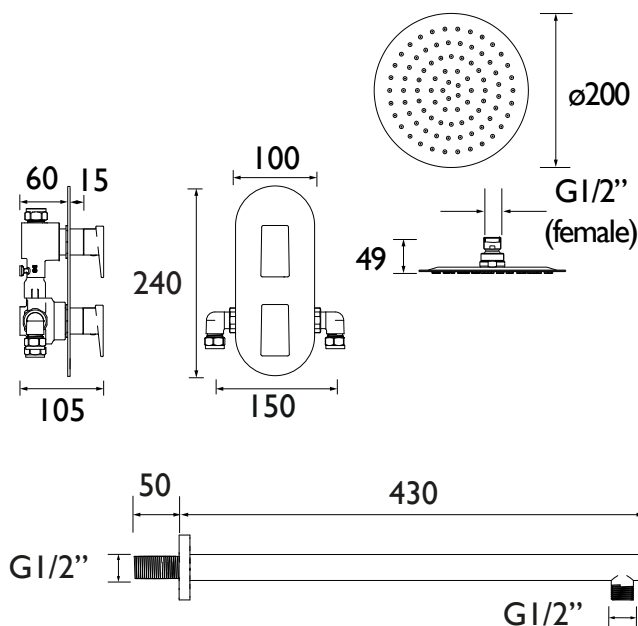

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	2.2	3.5	5	7	8.6	11.1
Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1
With Flow Limiters (mixed)	2	3.1	4.4	6.3	7.7	9.9

TECHNICAL
DATA
SHEET



BRISTAN

D9

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.