

SAIL SHWR PK

SAIL Shower Range Complete Sail Recessed Dual Control Shower Pack



Features:

- All in one box - pack includes shower valve with slimline 200mm round drench head and shower arm so nothing to buy separately
- Rub clean drench head - limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Slim design recessed shower valve will fit into a cavity space as small as 35mm for hassle-free installation.
- Thermostatic cartridge with preset temperature safety stop at 42°C for family-safe showering. A higher temperature can be selected, if required, by selecting the override function.
- Dual control - Flow and temperature are operated separately giving accurate control of both.

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
Shower Kit:	N/A
Shower Head Type:	Fixed Head
Rub Clean Handset:	Yes
Mounting Type:	Wall Mounted
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	65
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Included:	No
Check Valve Included:	Yes
What's Included:	1 x Shower Valve, 1 x Round Fixed Head, 1 x Shower Arm, 1 x Fitting Instructions

Dimensions (measurements in mm)

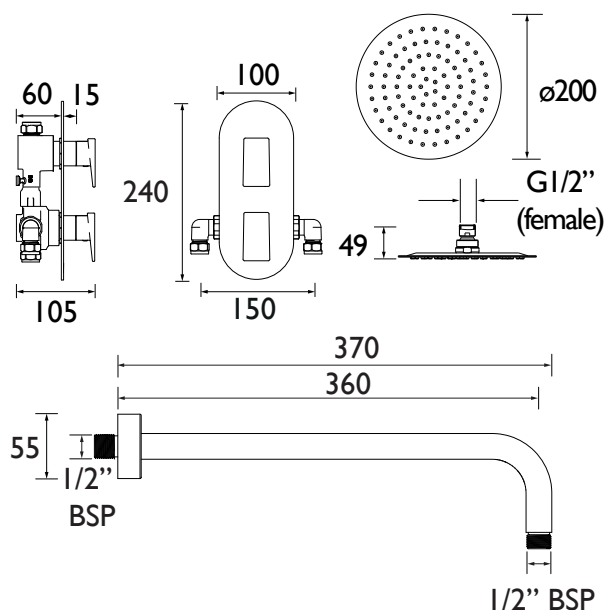

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1
With Flow Limiter	2	3.1	4.4	6.3	7.7	9.9

TECHNICAL
DATA
SHEET



BRISTAN

D8

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.