

PIVOT

Recessed Thermostatic Dual Control Shower Valve Only


Product Specification

Product Code: PIV SHCVO C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Min 0.2 Bar, Max 5.0 Bar



Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rates at 0.2 Bar (open outlet without flow regulators) 9.0 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from the front

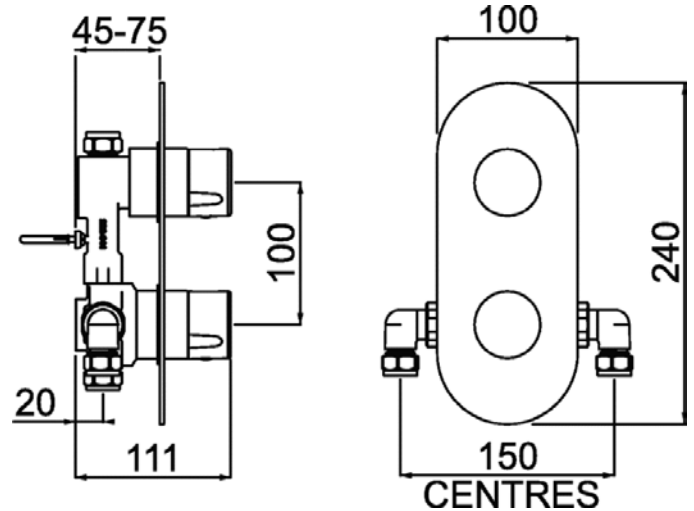

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	9.39	14.85	21	29.7	36.37	46.96

Compliance / Approvals

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 5 years covering manufacturing faults.

