

PM2 SHC3DIV C

PRISM Shower Range Prism Concealed Dual Control Valve with Diverter & Stopcock



Features:

- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Fully serviceable from the front
- Metal back plate and handles for added durability
- Supplied with wall outlet


Product Certifications:



WRAS Certificate No: 1507041
WRAS Expiry Date: 31/07/2020




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|---|
| Style: | Contemporary |
| Finish/Colour: | Chrome |
| Main Construction Material: | Brass |
| No of Controls: | 3 |
| Shower Type: | Dual Control |
| Shower Head Type: | None |
| Valve/Cartridge Type: | Thermostatic Cartridge & 3/4" Ceramic Disc Valve |
| Maximum Hot Water Supply Temperature °C: | 65 |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Suitable for all plumbing systems, ideally balanced |
| Working Pressure Range: | Min: 0.2 bar, Max: 5 bar |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | 15mm Compression |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Dimensions (measurements in mm)

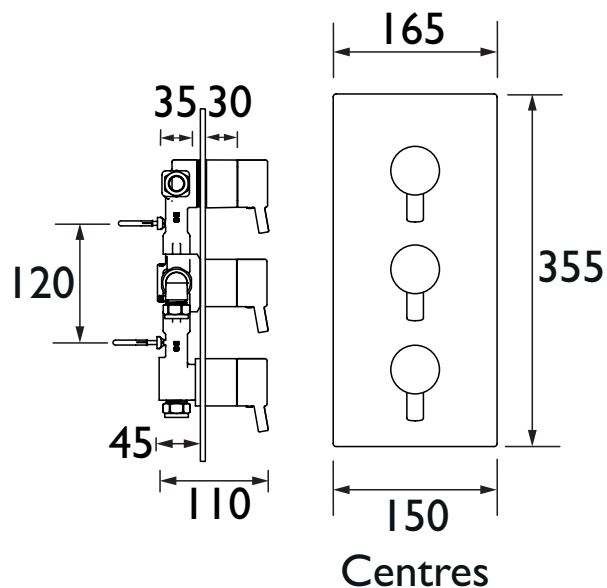

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-------------------------|-----|------|------|------|------|------|
| Outlet 1 (via CD Valve) | 8.3 | 14.5 | 21.2 | 30 | 36.7 | 47.4 |
| Outlet 2 (via Diverter) | 6.7 | 12.4 | 18.5 | 26.2 | 32 | 41.4 |
| Outlet 3 (via Diverter) | 6.6 | 12.1 | 18 | 25.5 | 31.2 | 40.3 |

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D4