

# ORB SHC3DIV C

## ORB Shower Range Orb Recessed Dual Control Shower Valve with Integral Two Outlet Diverter and Stopcock Chrome



### Features:

- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Requires rear access to service the filters
- Cartridge can be accessed from the front
- Supplied with wall outlet

### Product Certifications:



WRAS Cert. Number: 2005900  
WRAS Expiry Date: 31/05/2025




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes
Pre-set Outlet Temperature °C:	42

### Dimensions (measurements in mm)

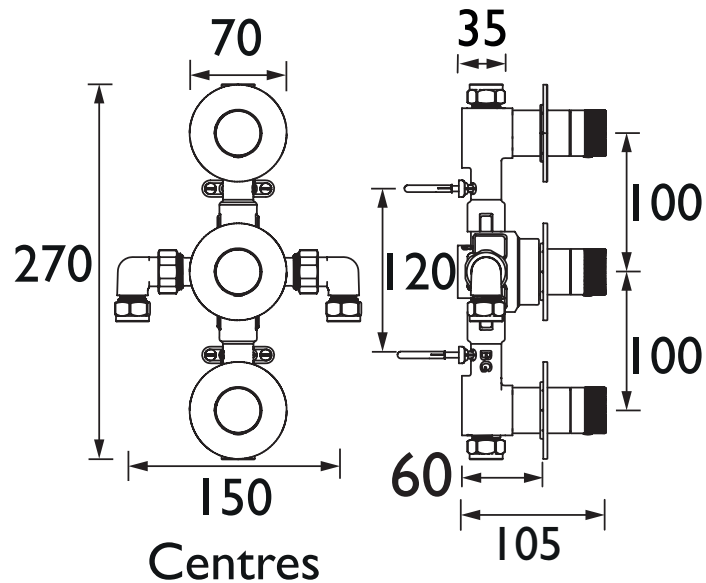

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 (Mixed)	9.5	15	21.2	30	36.7	47.4
Outlet 2 (Mixed)	8.3	14.5	18.5	26.2	32	41.4
Outlet 3 (Mixed)	8.1	12.7	18	25.5	31.2	40.3

# TECHNICAL DATA SHEET



# BRISTAN

D5