


TECHNICAL DATA SHEET

TRIA

Recessed Thermostatic Three Control Shower Valve with Stopcock & Two Outlet Diverter


Product Specification

Product Code: TRI SHC3DIV C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction
Cartridge Type: Ceramic disc valve
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Working pressures 0.2-5.0 Bar

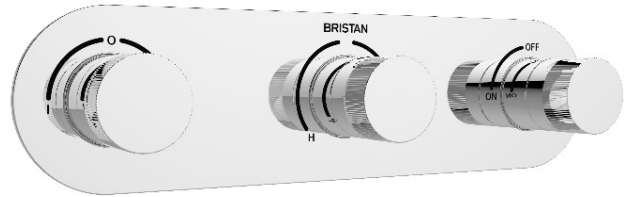

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min from diverter, 9 l/min from stopcock. 12l/min from both outlet together
- Requires rear access to service the filters
- Cartridge can be accessed from front

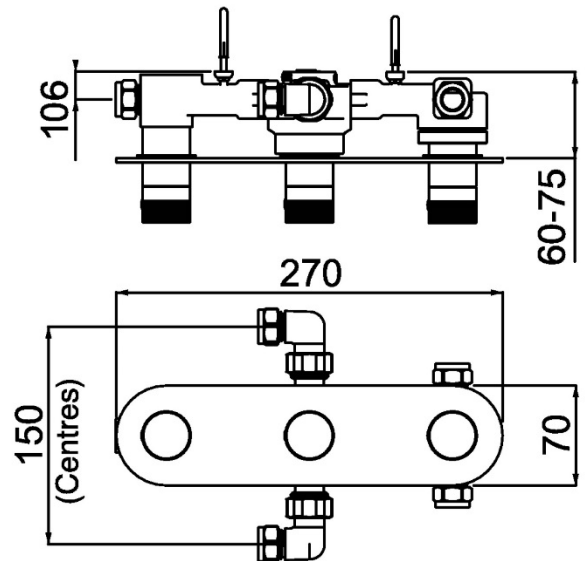

Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	9.48	15	21.2	29.98	36.72	47.41
Outlet 2	8.27	13.08	18.5	26.16	32.04	41.37
Outlet 3	8.05	12.73	18	25.46	31.18	20.25

Compliance / Approvals

WRAS Approval No: 1507041

Technical Advice: For further information please call 0844 7016273
 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

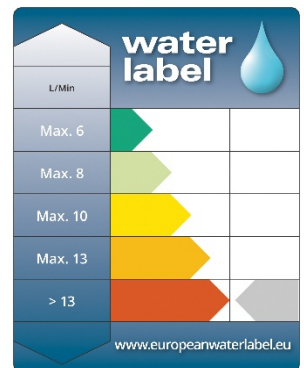

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 15G
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com

