# QD BSM E6 C

## QUADRATO Tap Range Quadrato Bath Shower Mixer Eco6

Chrome



#### Features:

- Supplied with metal handles
- Chrome plated to BS EN 248
- Supplied with single function rub clean handset, 1.75m hose & wall bracket
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency (Flow Regulator accurate +/- 10%)


## Product Certifications:



For more products, visit our website: http://www.bristan.com

Specification				
Product Type:	Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Fliw Straightener, 6 I/min Flow Limiter			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.5 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

## Dimensions (measurements in mm)

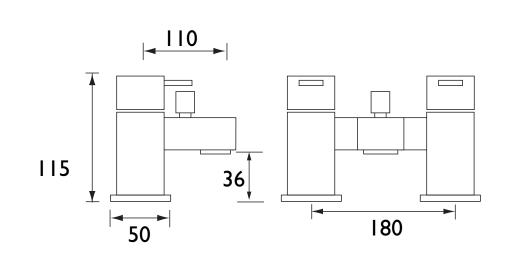

http://www.bristan.com	Flow Rates (l/min)							
化输送器	System Pressure (bar)	0.5	0.5	1	2	3	5	
	Through Bath Filler (mixed)	8.2	8.2	11.5	16.3	20	25.8	
	Through Handset (mixed)	6	6	6	6	6	6	
TECHNICAL DATA SHEET	ARANTE RARS PORTAL ANTERS		B	RI8	577		D3	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.