

# PM SHXMMCTFF C

## PRISM Shower Range Prism Safe Touch Bar Mixer with Adjustable Riser Rail, Multi Mode Handset and Fast Fit Wall Fixings



### Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- TMV2 thermostatic control for a higher level of performance and protection
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
- Dual control - flow and temperature are controlled separately
- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar showers, using built in front-of-wall isolation valves

### Specify As:

Prism Thermostatic TMV2 Exposed Cool Touch Bar Valve with Adjustable Riser Kit, Peg Handles, Multi Function Handset and Fast Fit Connections.

### Product Certifications:



WRAS Cert. Number: 2005902  
WRAS Expiry Date: 31/05/2025




TMV2 Cert. Number: NSF2262/0720  
TMV2 Expiry Date: 16/07/2025



### Specification

Product Type:	Mixer Shower
Main Construction Material:	Brass
Connection Outlet:	G 3/4" BSP
Connection Inlet:	15mm Compression
Number of Controls:	2
Flow Control Valve Type:	Thermostatic
Plumbing System:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.2 Bar
Maximum Dynamic Pressure:	5.0 Bar
Maximum Static Pressure:	10
Maximum Hot Water Temperature: (°C)	60
Pre-set Outlet Temperature: (°C)	38°C
Isolation Included:	No
Check Valve Supplied:	Yes
Shower Kit:	

### Dimensions (measurements in mm)

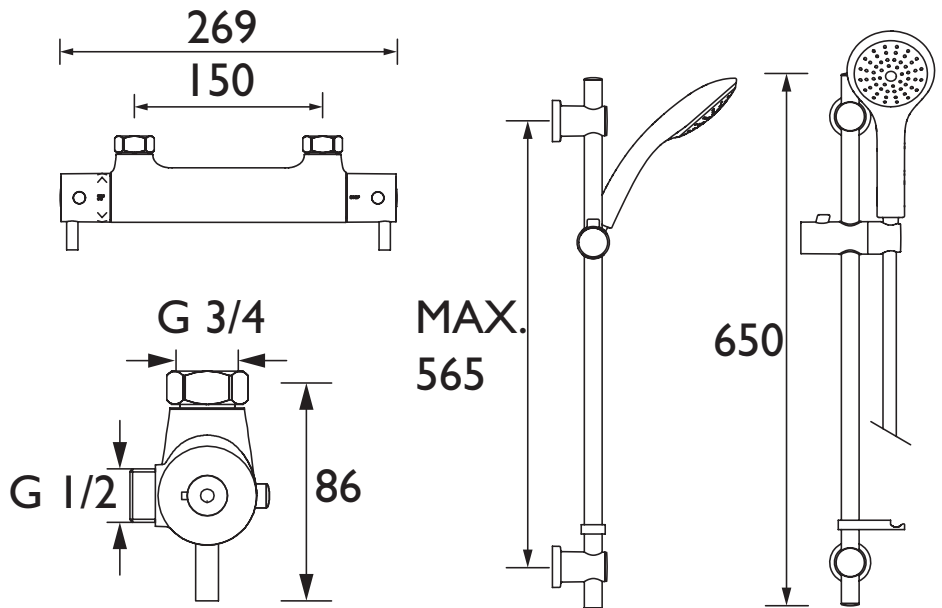

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.2	7.5	11.2	15.8	19.4	25

For more products, visit our website:  
<http://www.bristan.com>



# TECHNICAL DATA SHEET



# BRISTAN

D6