TFP4001

COMMERCIAL Shower Range Timed Flow Shower Panel With Adjustable Head




| Specification | |
|--------------------------------|---|
| Style: | Contemporary |
| Finish/Colour: | Chrome |
| Main Construction Material: | Steel |
| No of Controls: | 1 |
| Shower Type: | Timed Flow Shower |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | All - Ideally Balanced |
| Working Pressure Range: | Min. 1.0 Bar - Max. 5.0 Bar |
| Connection Inlet: | ³ ⁄4" BSP male telescopic connection |
| Connection Outlet: | N/A |
| Check Valve Included: | No |
| Flow Type: | Single Flow |

Features:

- Supplied pre-plumbed and ready for connection to a preblended supply
- Water saving push button operation with timed flow
- Vandal resistant shower head with adjustable spray angle
- Easy installation
- 15mm inlet connection

Product Certifications:

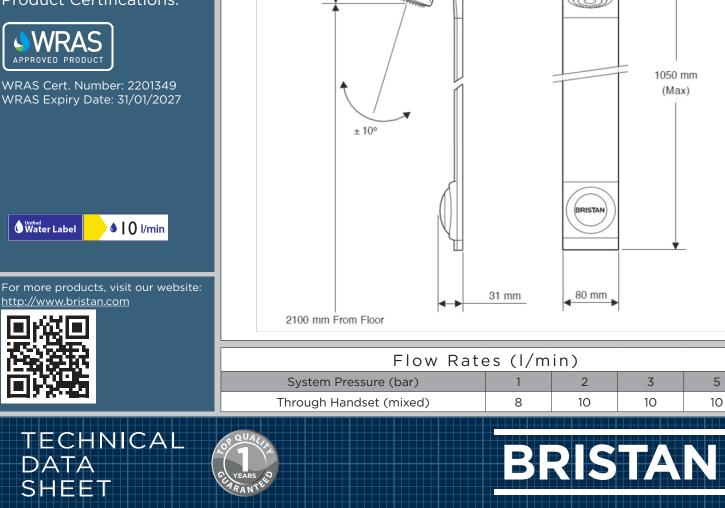

0

117 mm

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Email: enquire@bristan.com. Telephone: 0330 026 6273. Web Site: www.bristan.com The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Dimensions (measurements in mm)

🗲 25 mm

0 0

D4