



### Features:

- Supplied pre-plumbed and ready for connection to a pre-blended supply
- Water economy push button operation with 25 second constant flow (+5/-10 secs)
- Vandal resistant showerhead with adjustable spray pattern rings
- 15mm inlet connection
- Max. inlet pressure 5.0 bar


### Product Certifications:



WRAS Certificate No: 250403307  
WRAS Expiry Date: 30/04/2030




For more products, visit our website:  
<http://www.bristan.com>



### Specification

|  |   |
|--|---|
| Style:                                   | Utility   |
| Main Construction Material:              | Brass   |
| No of Controls:                          | 1   |
| Shower Type:                             | Timed Flow (25 Seconds)                               |
| Shower Head Type:                        | Fixed Anti-Vandal                                     |
| Valve/Cartridge Type:                    | Manual  |
| Maximum Hot Water Supply Temperature °C: | 65 (pre-blended). 41 C Recommended for safe showering |
| Dynamic Pressure Range:                  | 5   |
| Maximum Static Pressure: (bar)           | 10  |
| Plumbing System Suitability:             | All Systems   |
| Working Pressure Range:                  | Min. 0.2 Bar, Max. 5.0 Bar                            |
| Connection Inlet:                        | 15mm  |
| Connection Outlet:                       | Open  |
| Check Valve Included:                    | No  |

### Dimensions (measurements in mm)

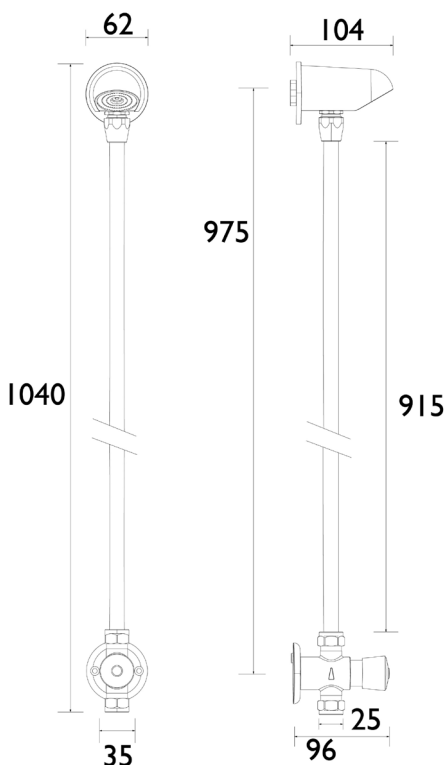

### Flow Rates (l/min)

| System Pressure (bar)   | 0.2 | 0.5 | 1  | 2  | 3  | 5  |
|-------------------------|-----|-----|----|----|----|----|
| Through Handset (mixed) | 6   | 9   | 13 | 18 | 22 | 30 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D6