

# TUF100CCP

## GUM Shower Range

Concealed Timed Flow Control for Water Economy



### Features:

- 25 second time delay (+5/-10 secs)
- Operates showers or urinals
- Minimum working pressure 0.2 bar
- 15mm inlet and outlet connections
- Max. inlet pressure 3.0 bar
- Concealed Timed Flow Push Button Water Control.


### Product Certifications:



WRAS Cert. Number: 2011119  
WRAS Expiry Date: 30/11/2025




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Timed flow
Shower Kit:	N/A
Valve/Cartridge Type:	Manual
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	3
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm
Connection Outlet:	15mm

### Dimensions (measurements in mm)

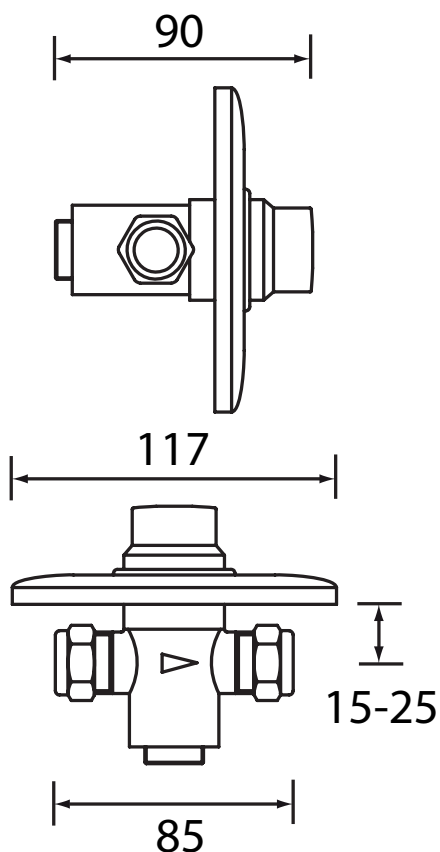

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3
Valve Only/Largest FR (mixed)	6	9	13	18	22
Through Handset (mixed)	6	9	13	18	22

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D5

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.