

CAD BAS C

CADET Tap Range Cadet Basin Mixer Chrome



Features:

- Supplied with clicker waste
- Supplied with metal handles
- Chrome plated to BS EN 248

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever Handle
Connection Inlet:	1/2" BSP Flexible Tails
Connection Outlet:	M24 Flow Straightener
Number of Tap Holes:	1
Valve/Cartridge Type:	Ceramic Disc Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.2
Maximum Dynamic Pressure:	5.0
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	No

Dimensions (measurements in mm)

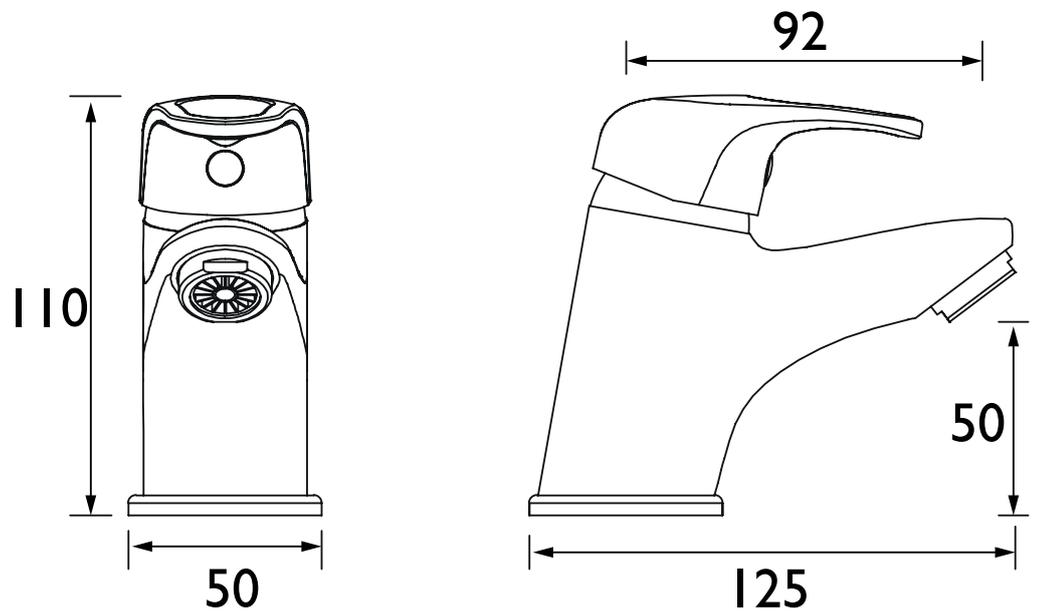

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
CAD BAS C	4.9	8.5	12.4	17.9	22.1	28.6

TECHNICAL DATA SHEET



BRISTAN

D11