


# H64WMT2

## COMMERCIAL Tap Range

Thermostatic Wall Mount  
TMV3 HTM64 Mixer Tap

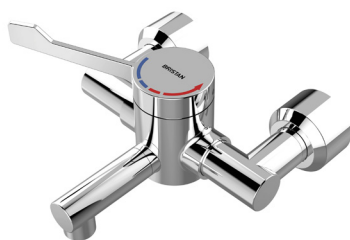

### Features:

- Complies with HTM04-01
- Safe Touch surface temperature
- Integral flush system assists against infection
- Smooth internal waterways
- 1-step isolation and filter removal
- Supplied with eccentric tails
- Designed for safe handwash healthcare applications to meet D08 regulations
- Not suitable to deliver potable water

### Product Certifications:



WRAS Certificate No: 2101906  
WRAS Expiry Date: 31/01/2026




TMV3 Certificate No: 2503774(K)  
TMV3 Expiry Date: 28/03/2030



### Specification

Product Type:	Commercial
Main Construction Material:	Brass
Mount Type:	Wall Mounted
Handle Type:	Lever Handle
Connection Inlet:	15mm Compression with Eccentric Isolation
Connection Outlet:	Aerator and Open Outlet Options included
Number of Tap Holes:	2
Valve/Cartridge Type:	Thermostatic Sequential Cartridge
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.2 bar
Maximum Dynamic Pressure:	5.0 bar
Maximum Hot Water Temperature: °C	60
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Isolation Included:	Yes
Pre-set Temperature °C:	41

### Dimensions (measurements in mm)

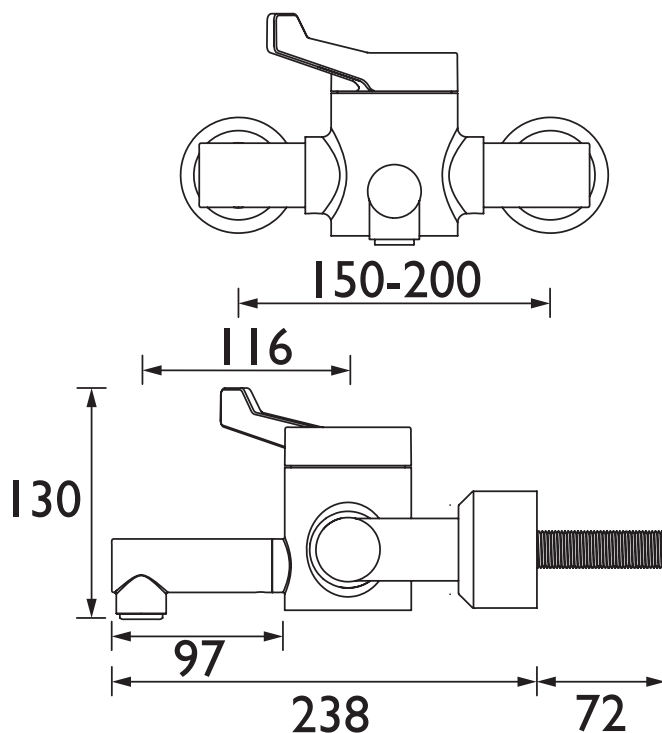

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
H64WMT2	1.5	2.3	3.3	4.7	5.7	7.4

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D11