

# HOU SHCDIV C

## HOURGLASS Shower Range Hourglass Recessed Dual Control Shower Valve with Two outlet Diverter Chrome



### Features:


- Slim design recessed shower valve will fit into a cavity space as small as 35mm for hassle-free installation.
- Includes integral two outlet diverter, which allows you to easily switch to an outlet of your choice such as a drench head or handset.
- Cartridge can be accessed from the front for easy servicing.
- Metal back plate and handles for added durability.
- Minimum cold water supply temperature is 4°C.

### Product Certifications:



WRAS Certificate No: 2005901  
WRAS Expiry Date: 31/05/2025


For more products, visit our website:  
<http://www.bristan.com>



### Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	None
Shower Kit:	N/A
Valve/Cartridge Type:	40mm Single Lever Cartridge
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

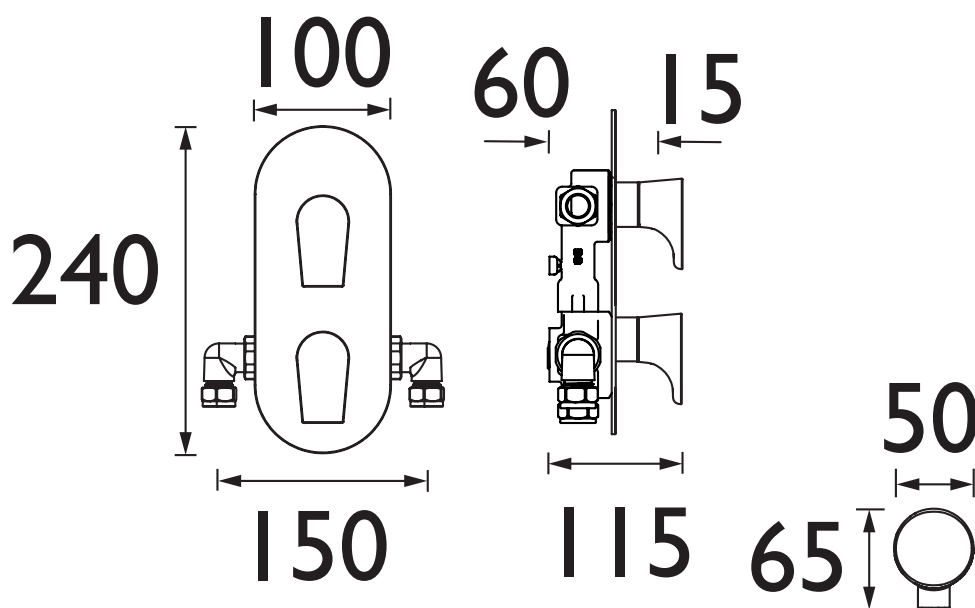

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Open Outlet (mixed)	8.5	13.4	19	26.9	32.9	42.5

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D8