

SOLO-NM SL

SOLO Tap Range Solo Non-Thermostatic Healthcare Tap with Short Lever Handle



Features:

- Pressure balancing basin mixer tap with short lever handle
- Maximum temperature stop is adjustable for user safety and comfort
- Removable spout to aid infection control regimes
- A choice of fully draining or laminar flow outlets supplied
- Smooth machined internal waterways to help limit the build-up of bacteria within the tap body
- All flow limiters accurate to +/- 10%

Product Certifications:



WRAS Certificate No: 2210900
WRAS Expiry Date: 31/10/2027




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|-----------------------------------|
| Product Type: | Commercial |
| Main Construction Material: | Brass |
| Mount Type: | Deck |
| Handle Type: | Lever |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | M24 Flow Straightener |
| Number of Tap Holes: | 1 |
| Valve/Cartridge Type: | 35mm Cartridge |
| Plumbing System Requirements: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.5 bar |
| Maximum Dynamic Pressure (bar): | 5 bar |
| Maximum Hot Water Temperature °C: | 80°C |
| Maximum Static Pressure (bar): | 10 bar |
| Flow Type: | Single |
| Isolation Included: | No |

Dimensions (measurements in mm)

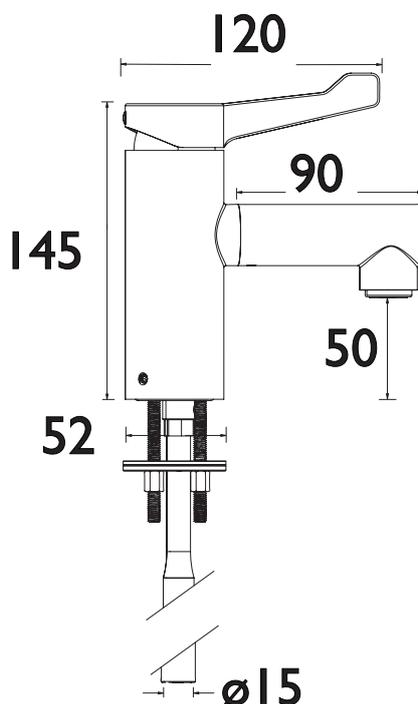

Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1 | 2 | 3 | 4 | 5 |
|-----------------------|-----|-----|---|---|---|---|
| SOLO-NM SL (mixed) | 3.3 | 4.6 | 5 | 5 | 5 | 5 |

TECHNICAL DATA SHEET



BRISTAN

D5