MCLR BASNW CR




Features:

- Flexi Tails
- Metal Fixing Nut
- Ceramic cartridge

http://www.bristan.com

Specification				
Style:	Contemporary			
Product Type:	Bathroom Taps			
Finish/Colour:	Chrome/Copper Radiance			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever			
Connection Inlet:	1/2" BSP Female			
Connection Outlet:	N/A			
Number of Tap Holes:	1			
Valve/Cartridge Type:	35mm Ceramic Cartridge			
Plumbing System Requirements:	All Plumbing Systems			
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar			
Maximum Hot Water Temperature: °C	65			
Maximum Dynamic Pressure: (bar)	5			
Maximum Static Pressure: (bar)	10			
Flow Type:	Single			
Flow Rate: (I/min @ 3 bar)	23.3			

Dimensions (measurements in mm)

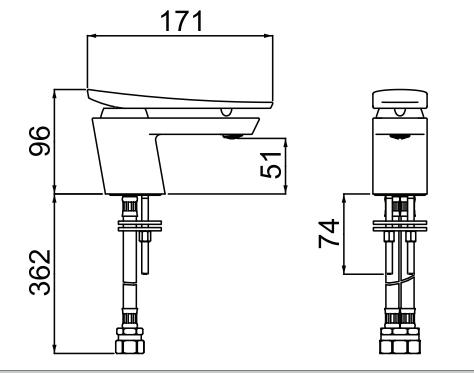

商業	Flow Rates (I/min)							
	System Pressure (bar)	0.2	0.5	1	2	3	5	
	MCLR BASNW CR	5.6	8.9	12.6	17.8	22.1	28.5	
TECHNICAL DATA SHEET	REAR INTER		B	RIS		AN & showe	RS D1	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.