MHOU SHCDIV GG

HOURGLASS Shower Range

Metallix Hourglass Concealed Dual Control Valve and Diverter Graphite Glisten



Features:

- Valve will fit in 35mm cavity space
- Cartridge can be accessed from the front
- Requires rear access to service the filters
- Chrome plated to BS EN 248
- Supplied with wall outlet


Specification					
Style:	Contemporary				
Finish/Colour:	Chrome/Graphite Glisten				
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Dual Control				
Valve/Cartridge Type:	Thermostatic				
Maximum Hot Water Supply Temperature °C:	65				
Dynamic Pressure Range: (bar)	5				
Maximum Static Pressure: (bar)	10				
Plumbing System Suitability:	All Plumbing Systems				
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar				
Flow Rate: (I/min @ 3 bar)	33				
Connection Inlet:	1/2" BSP				
Connection Outlet:	1/2"				
Isolation Valve Included:	No				
Check Valve Included:	No				

Product Certifications:



WRAS Cert. Number: 2005901 WRAS Expiry Date: 31/05/2025

Dimensions (measurements in mm)

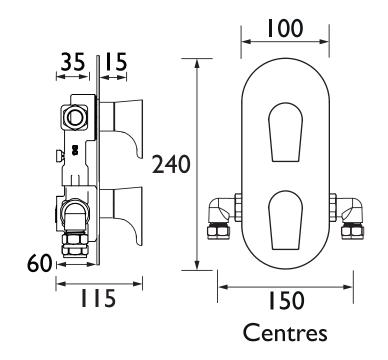

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	1	2	3	5	
Open Outlet (SHCDIV)	8.5	13.44	19	26.87	32.91	42.49	

TECHNICAL DATA SHEET



BRISTAN