## MPIV2 SHCDIV CR

## PIVOT Shower Range Metallix Pivot 2 Concealed Dual Control Valve and Diverter Copper Radiance




L C STI Ird	, o
Feature	<b>.</b>

- Rear access to service the filters
- Integral two outlet diverter
- Valve will in 35mm cavity space
- Separate controls for temperature and flow
- Cartridge can be accessed from the front

Specification					
Style:	Contemporary				
Finish/Colour:	Chrome/Copper Radiance				
Main Construction Material:	Brass				
No of Controls:	2				
Shower Type:	Dual Control				
Valve/Cartridge Type:	Recessed				
Maximum Hot Water Supply Temperature °C:	65				
Dynamic Pressure Range: (bar)	5				
Maximum Static Pressure: (bar)	10				
Plumbing System Suitability:	All Plumbing Systems				
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar				
Flow Rate: (I/min @ 3 bar)	33				
Connection Inlet:	1/2" BSP				
Connection Outlet:	1/2" BSP				
Isolation Valve Included:	No				
Check Valve Included:	No				

Dimensions (measurements in mm)

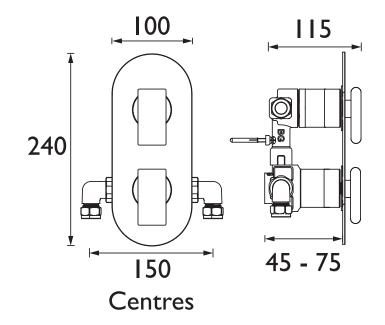

For more products, visit our website: <a href="http://www.bristan.com">http://www.bristan.com</a>



Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Handset (mixed)	8.5	13.44	19	26.87	32.91	42.49		

## TECHNICAL DATA SHEET



