MSAI SHCDIV CR

SAIL Shower Range Metallix Sail Concealed Dual Control Valve and Diverter Copper Radiance



Features:

- Metal backplate and handles
- Intergral two outlet diverter
- Valve will in 35mm cavity space
- Fully serviceable from the front
- Supplied with wall outlet

Product Certifications:




WRAS Cert. Number: 2005901 WRAS Expiry Date: 31/05/2025


For more products, visit our website: <u>http://www.bristan.com</u>



Specification				
Style:	Contemporary			
Finish/Colour:	Chrome/Copper Radiance			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Dual Control			
Valve/Cartridge Type:	Thermostatic			
Maximum Hot Water Supply Temperature °C:	65			
Dynamic Pressure Range: (bar)	5			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All Plumbing Systems			
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar			
Flow Rate: (I/min @ 3 bar)	33			
Connection Inlet:	1/2" BSP			
Connection Outlet:	1/2"			
Isolation Valve Included:	No			
Check Valve Included:	No			

Dimensions (measurements in mm)



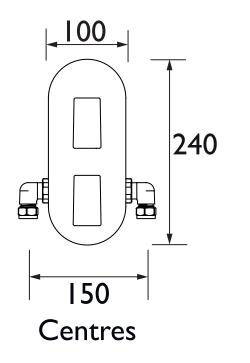

Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	1	2	3	5	
Open Outlet (SHCDIV)	6.9	12.8	19	27.6	33	42.49	

TECHNICAL DATA SHEET

A B YEARS HO



Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Email: enquire@bristan.com.Telephone: 0330 026 6273. Web Site: www.bristan.com The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.