RS SNK EF C TO

RENAISSANCE Tap Range Reniassance Easyfit Sink Mixer

Chrome Tap Only



Features:

http://www.bristan.com


\$37.6 l/min

For more products, visit our website:

- Long life and easy to use 1/4 turn ceramic disc valves
- Product supplied without Easyfit base
- Minimum working pressure of 0.4 bar

	Kitchen Taps
Main Construction Material:	
	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	1/2" BSP Female Flexible Tails
Connection Outlet:	Anti-Splash
Number of Tap Holes:	1
Valve/Cartridge Type:	1/2" Ceramic Disc Valve
Plumping System Requirements.	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.4 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	Yes

Dimensions (measurements in mm)

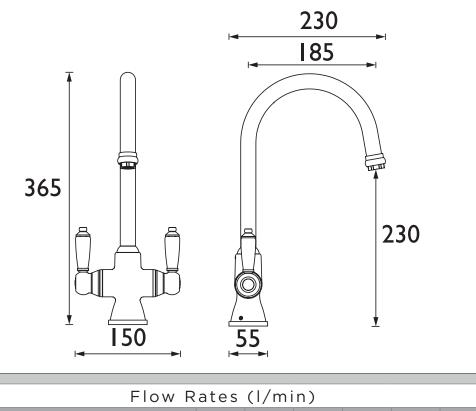

	Flow Rates (I/min)							
	System Pressure (bar)	0.4	0.5	1	2	3	5	
	RS SNK EF C TO (mixed)	13.7	15.4	21.7	30.7	37.6	48.5	
ECHNICAL ATA (HEET	ARANTER CARANTER		В	RIS	ST/		D3	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Product Certifications: