MH SNK EF C TO

MANHATTAN Tap Range Manhattan Easyfit Mono Sink Mixer Chrome Tap Only



_							s:
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.
	ᆫ	a	u	u		C	Э.

- Long life and easy to use 1/4 turn ceramic disc valves
- Product supplied without Easyfit base
- Minimum working pressure of 0.3 bar

	-
Product Certifications:	

Water Label


33.6 l/min

For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Kitchen Taps				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever Handles				
Connection Inlet:	1/2" BSP Flexible Tails				
Connection Outlet:	Flow Straightener				
Number of Tap Holes:	1				
Valve/Cartridge Type:	1/2" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single Flow				
Isolation Included:	Yes				

Dimensions (measurements in mm)

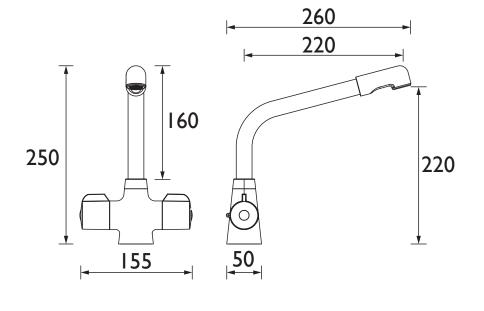

Flow Rates (I/min)									
System Pressure (bar)	0.3	0.5	1	2	3	5			
MH SNK EF C TO (mixed)	10.6	13.7	18.8	27.2	33.6	43.4			

TECHNICAL DATA SHEET



