RSP EFSNK C TO

RASPBERRY Tap Range Raspberry Easyfit Monobloc Sink Mixer Chrome Tap Only



H	ea	ıtι	ıre	:S

- Long life ceramic cartridge for added durability and ease of use
- Product supplied without Easyfit base
- Minimum working pressure of 0.3 bar

Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Lever Handle					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	Anti Splash					
Number of Tap Holes:	1					
Valve/Cartridge Type:	35mm Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.3 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single Flow					
Isolation Included:	Yes					

Product Certifications:



WRAS Cert. Number: 1911910 WRAS Expiry Date: 30/11/2024






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

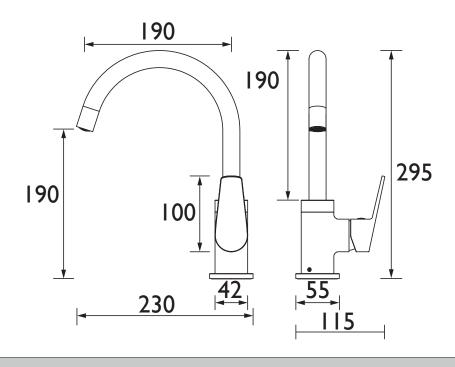

Flow Rates (I/min)									
System Pressure (bar)	0.3	0.5	1	2	3	5			
RSP EFSNK C TO (mixed)	6.7	8.8	13.2	19	23.6	30.3			

TECHNICAL DATA SHEET



BRISTAN