

# BRISTAN

## Installation Instructions & User Guide


Please leave these instructions  
with the end user

Product Code: SK INXTT1 SR (D3)

### Tools You'll Need



Adjustable Spanner




Silicon Sealant




Electric Drill




Safety Glasses



Hexagonal Key




Crosshead Screwdriver




Jigsaw


### Pack Contents

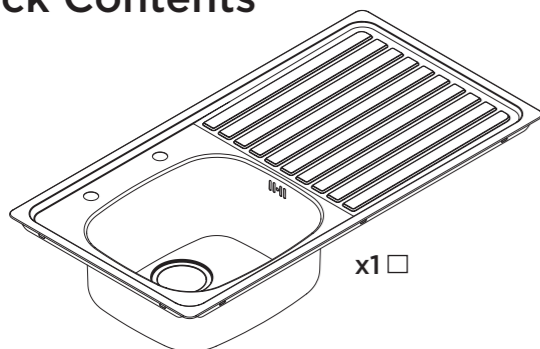

x1

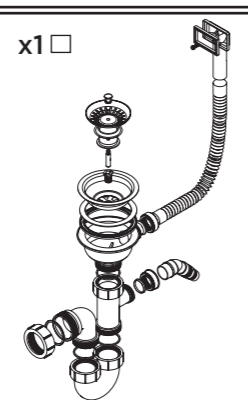


x1



x1

x10



### Prior to Installation

All products manufactured and supplied by Bristan are safe provided they are installed, used correctly and receive regular maintenance in accordance with these instructions.

This product has been tested to the Water Regulations Advisory Scheme (WRAS) and satisfies the requirements of the Water Supply (Water Fittings) Regulations 1999 and current bylaws. For full Installation Requirements & Notes (IRN) please visit [wras.co.uk/directory](http://wras.co.uk/directory).

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance.

Before installing these taps the water supply must be thoroughly flushed in order to remove any swarf, solder etc.

This product must not be modified in any way as this will invalidate the guarantee.

Before drilling into walls, check that there are no hidden electrical wires, cables or water supply pipes. This can be checked with the aid of an electronic detector.

If power tools are used do not forget to:


- Wear eye protection
- Unplug equipment after use

If in doubt, contact a registered plumber or your Local Water Authority or the Secretary of the Institute of Plumbing, address as follows:-


The Institute of Plumbing,  
64 Station Lane,  
Hornchurch,  
Essex,  
RM12 6NB, Tel: 01708 472791




### Dimensions

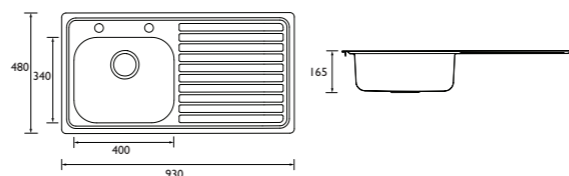

### Inlet Connections



Waste Connection Size: G 1 1/2"




Min Worktop Thickness: 30mm  
Max Worktop Thickness: 40mm

### Installation

1

Ensuring it's straight, place the  
Cutter Guide on the worktop  
and draw around the dotted line.  
Drill and cut the hole.




2

Fit the waste  
bodies to the sink.  
Secure in place  
with the screw.




3



Screw the Overflow Connection into  
place and connect to the waste body.  
Carefully turn the sink upside-down.


4

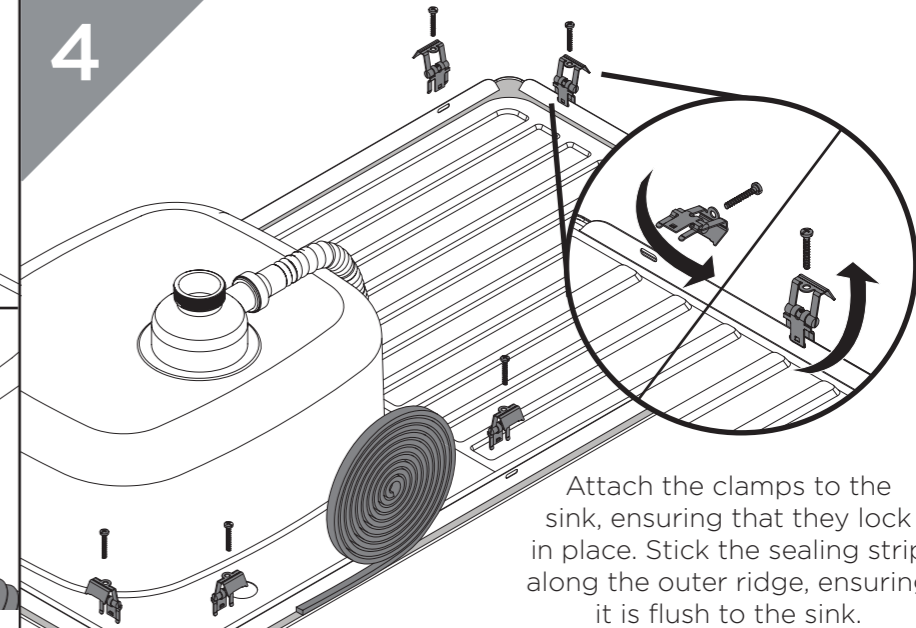

Attach the clamps to the  
sink, ensuring that they lock  
in place. Stick the sealing strip  
along the outer ridge, ensuring  
it is flush to the sink.

5

Place the sink  
in position.  
Tighten the  
clamps to  
secure the sink.



Use batons  
to grip the  
clamps if the  
worktop is  
thinner than  
30mm

6

**REMEMBER**  
The waste  
pipes can be  
cut to size to  
fit the sink

Connect  
the T-piece and  
appliance connector  
to the waste.  
Ensure the  
conical washer  
has the smaller side  
enter the T-piece.

Please see the  
Maintenance  
section for  
more details to  
connect a water  
appliance.

7

Connect  
the U-bend and waste  
outlet pipe ensuring all  
washers are in place.

You can now fit your  
EasyFit Tap.  
Please refer to those  
instructions to check the  
Pack Contents and  
Tap Maintenance.


General Cleaning

Bristan products are made from high quality stainless steel, or glass conforming to BS EN 12150. Your sink should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and dried with a soft cloth. Any residues from soap, food, toiletries etc. should be rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar. Avoid scraping the sink basin or draining board with utensils or dropping heavy/sharp objects on to the sink surface. Do not place hot objects directly on to the sink.


Plumbing the Waste to a Kitchen Appliance

1



Unscrew the pipe above the U-bend.

2

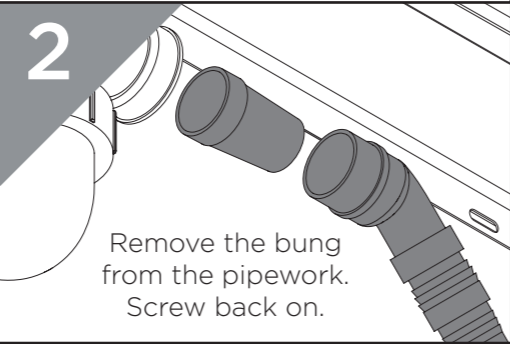


Remove the bung from the pipework. Screw back on.

3

Refer to your appliance Fitting Instructions in order to connect the waste.


IMPORTANT

Isolate the water supply before starting!




Maintenance - Unblocking the Sink

1




Remove the U-bend from the waste pipework.

2

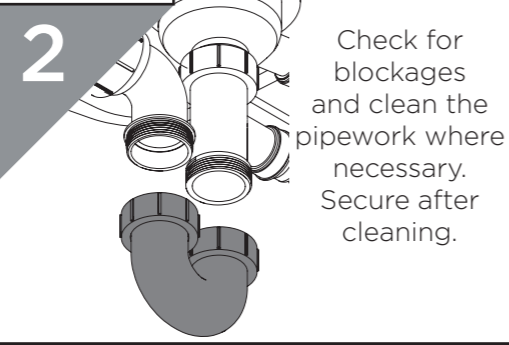

Check for blockages and clean the pipework where necessary. Secure after cleaning.


3



Let the water flow for a few minutes and check connections for any leaks.

IMPORTANT

Isolate the water supply before starting!



Troubleshooting

Symptom	Cause(s)	Remedy
Sink is leaking	Loose waste connections	Check waste connections for any leaks, ensuring all O-rings are in place.
	Seal around the sink edge/plug lets water through	Add extra silicon sealant to those edges to ensure a water tight seal.
	Sink leaking from the overflow	Check the overflow seal and connections for damage. Ensure the screw is tightened.
Water isn't draining from the sink	Sink is blocked.	Refer to the Maintenance Section for Unblocking the Sink. If no blockage is found in the waste pipework, please contact your local Plumber for guidance.
Clamps do not grip the worktop	Worktop is under 30mm	Use a strong material e.g. wood to place under the worktop in order for the clamps to grip.
Wobbly Tap/ Sink is Flexing	Tap grub screws are not tight enough at the base	Ensure the grub screws are fully tightened against the base. See your EasyFit Tap Instructions.
	Extra security may be required to support the tap base.	Refer to the Alternative Installation steps in order to wfit the Reinforcing Plate.

Notes

Spare Parts

To replace any spare parts for your sink, why not scan the QR Code or visit **www.bristan.com** and search for your product.



Contact Us

Bristan Group Ltd.

UK: Bristan Group, B78 1SG.  
EU: Masco Europe S.à.r.l.  
14 Rue Strachen  
6933 Mensdorf  
Luxembourg

Customer Service: +44330 026 6273  
Web: [www.bristan.com](http://www.bristan.com)  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)

A Masco Company

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee simply scan the QR code and register your product. Alternatively visit [www.bristan.com/register](http://www.bristan.com/register).

For any other queries, please call our Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit [www.bristan.com/guarantees](http://www.bristan.com/guarantees).



We Know & We Care