## GLORIOUS SHWR PK2<sup>GLORIOUS</sup> Shower Range Glorious Shower Pack 2 Complete



## Features:


- This timeless shower pack contains our Glorious shower valve with integral two outlet diverter. It has a 250mm square slimline fixed head with shower arm; a single function handset and hose with integral handset holder and wall outlet.
- The shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Dual control flow and temperature are controlled separately
- Cartridge can be accessed from the front, Requires rear access to service filters
- 15mm inlet connections

## Product Certifications: Witter Label & 8.6 l/min For more products, visit our website: http://www.bristan.com

## TECHNICAL DATA SHEET

Specification					
Finish/Colour:	Chrome Plated				
Main Construction Material:	Brass; ABS				
No of Controls:	3				
Shower Type:	Dual Control				
Shower Head Type:	Both				
Shower Kit:	Fixed Head and Handset with Holder				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn				
Maximum Hot Water Supply Temperature <sup>o</sup> C:	65				
Plumbing System Suitability:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2				
Maximum Dynamic Pressure (bar):	5				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G 1/2"				
Isolation Valve Included:	No				
Check Valve Included:	Yes				

Dimensions (measurements in mm)

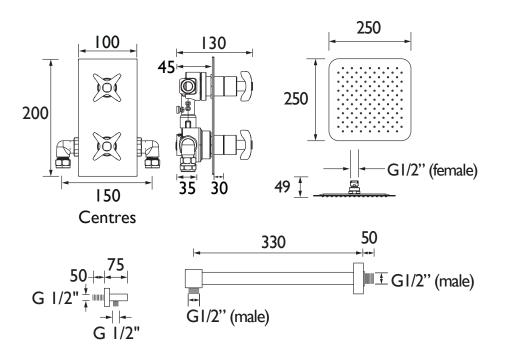

//www.bristan.com	Flow Rates (l/min)								
	System Pressure (bar)	2.2	0.5	1	2	3	5		
義務務	Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5		
	Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1		
2.107464	With Flow Limiters (valve only; mixed)	3.9	7	9.4	11.1	11.2	12.2		





Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com. \* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.