

SAIL SHWR PK2

SAIL Shower Range Sail Shower Pack 2 Complete



Features:

- This shower pack contains our super sleek Sail shower valve with integral two outlet diverter. It has a 250mm round slimline fixed head with shower arm; a single function handset, and hose with integral handset holder and wall outlet.
- Dual control - flow and temperature are controlled separately
- Cartridge can be accessed from the front, Requires rear access to service filters
- 15mm inlet connections
- Easy installation with an adjustable faceplate that fits total wall depths from 60mm to 75mm for a perfect flush finish

Product Certifications:



8.6 l/min


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	Both
Shower Kit:	Fixed Head
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

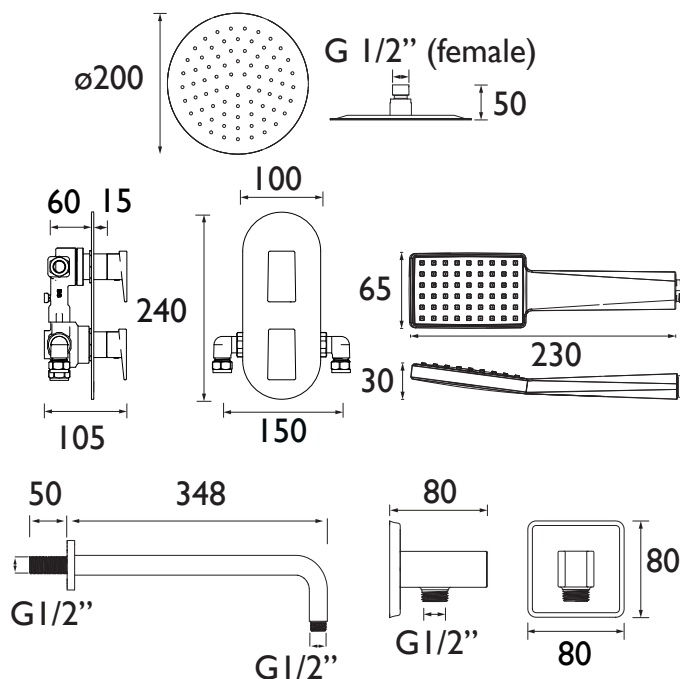

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	2.1	3.3	4.7	6.6	8.1	10.5
Through Fixed Head (mixed)	2.2	3.5	5	7	8.6	11.1
With Flow Limiters (mixed)	2	3.1	4.4	6.3	7.7	9.9

TECHNICAL
DATA
SHEET



BRISTAN

D3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - **Non-chrome product finishes carry a 3 year guarantee on finish.** See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.