

# BUZ2 SHXDIVCTFF C

## COOLTOUCH Shower Range

Buzz2 Adjustable Rigid  
Riser & Diverter Bar Shower



### Features:

- All in one box - pack includes bar shower valve, hose, telescopic riser rail and rub-clean anti-limescale drench and multi function handset so nothing to buy separately
- Supplied with a fast fit Wallmount 12 fixing kit with built-in front of wall isolation valves on both the hot and cold feed, making it simple to fit, maintain and replace.
- Safe Touch technology ensures the valve stays cool to the touch while in use
- Telescopic riser so you can adjust the height to suit your space. Giving you the flexibility to fit in a wet room/walk in shower or over a bath.
- Integral two outlet diverter so you can easily switch between the handset or drench head.

### Product Certifications:



WRAS Certificate No: 2306909  
WRAS Expiry Date: 30/06/2028




For more products, visit our website:  
<http://www.bristan.com>

### Specification

|  |                                     |
|--|-------------------------------------|
| Finish/Colour:                           | Chrome Plated                       |
| Main Construction Material:              | Zinc; Stainless Steel; ABS          |
| No of Controls:                          | 2                                   |
| Shower Type:                             | Bar Shower                          |
| Shower Head Type:                        | Fixed Head & Multi-Function Handset |
| Shower Kit:                              | Telescopic Riser with Fixed Head    |
| Valve/Cartridge Type:                    | Thermostatic Cartridge              |
| Maximum Hot Water Supply Temperature °C: | 65                                  |
| Plumbing System Suitability:             | Suitable for high pressure systems  |
| Minimum Dynamic Pressure (bar):          | 1                                   |
| Maximum Dynamic Pressure (bar):          | 5                                   |
| Maximum Static Pressure (bar):           | 10                                  |
| Connection Inlet:                        | 15mm Compression                    |
| Connection Outlet:                       | G1/2" and Riser Outlet              |
| Isolation Valve Included:                | Yes                                 |
| Check Valve Included:                    | Yes                                 |

### Dimensions (measurements in mm)

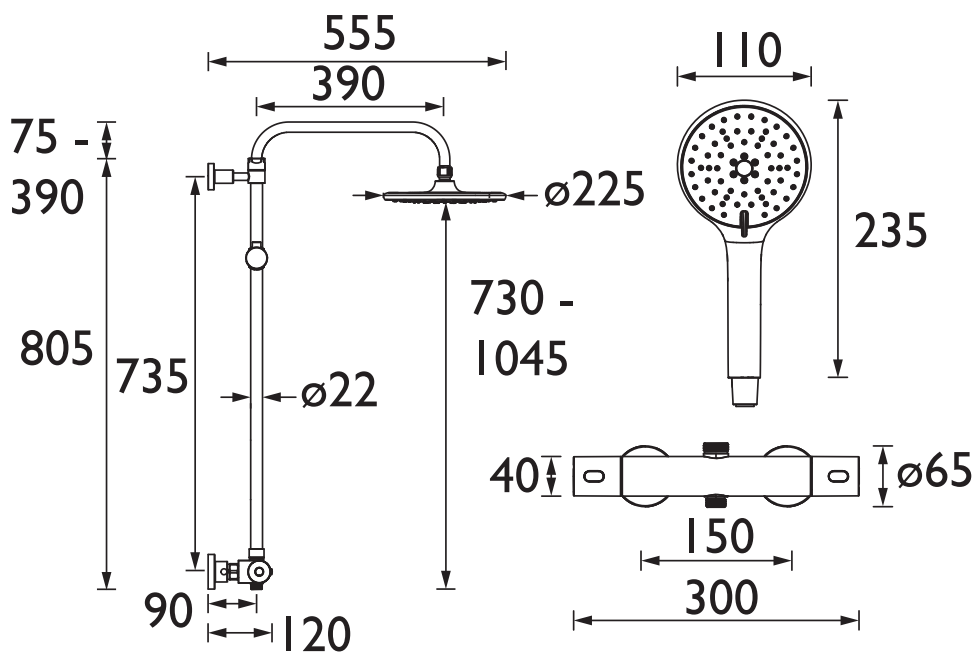

### Flow Rates (l/min)

| System Pressure (bar)      | 1   | 2   | 3   | 4    | 5    |
|----------------------------|-----|-----|-----|------|------|
| Through Fixed Head (mixed) | 3.9 | 5.7 | 8.2 | 10   | 11.6 |
| Through Handset (mixed)    | 5.5 | 7.8 | 9.6 | 10.8 | 12.4 |

TECHNICAL  
DATA  
SHEET



BRISTAN

D12

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - Non-chrome product finishes carry a 3 year guarantee on finish. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.