

233690

WICKES Shower Range

Square concealed shower valve with diverter Chrome



Features:

- G 1/2" inlet connections
- Chrome plated BS EN 248
- Integral diverter for 2 outlets
- Maximum hot water supply temperature is 65°C

Product Certifications:



WRAS Certificate No: 2101903
WRAS Expiry Date: 31/01/2026


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Concealed Shower Valve
Shower Head Type:	None
Valve/Cartridge Type:	35mm Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing Systems
Minimum Dynamic Pressure:	0.2 Bar
Maximum Dynamic Pressure:	5.0 Bar
Connection Inlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	No

Dimensions (measurements in mm)

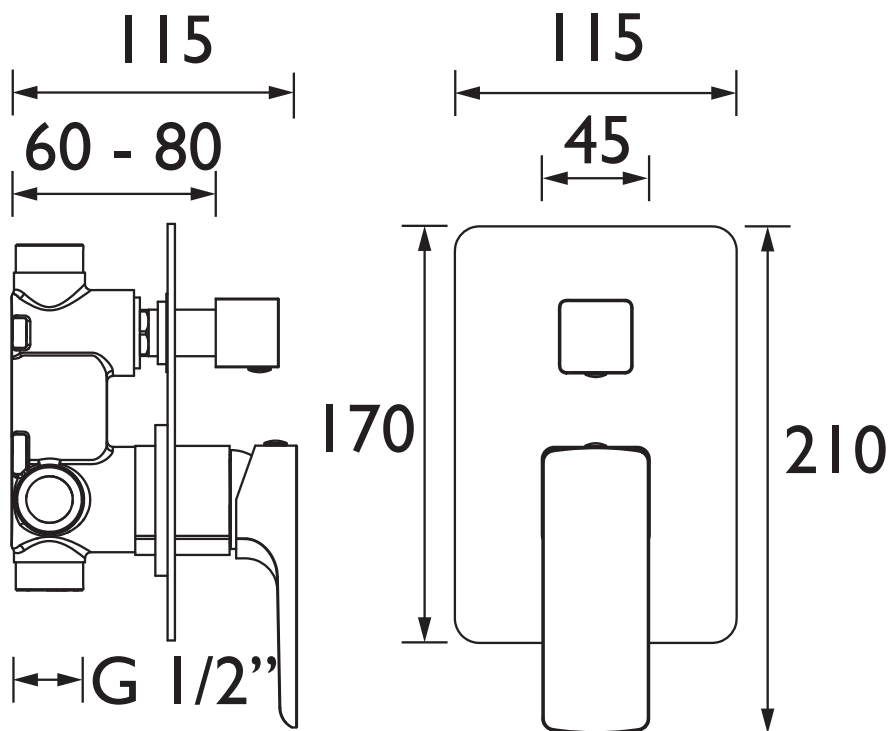

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Top Outlet	4.6	7.4	10.5	14.8	18	23.5
Bottom Outlet	5.0	8.0	11.0	16	19.6	25.4

TECHNICAL DATA SHEET



BRISTAN

D2