OPS BSM C

OPUS Tap Range Opus Bath Shower Mixer Chrome



_							s:	
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.	
	ᆫ	a	u	u		C	Э.	
							_	

- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 5 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps and Accessories available

Product Certifications:



WRAS Cert. Number: 2003099 WRAS Expiry Date: 31/03/2025




62 l/min

For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Bathrom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever Handles				
Connection Inlet:	3/4" BSP				
Connection Outlet:	M24 Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valves - 1/4 Turn				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single Flow				
Isolation Included:	No				

Dimensions (measurements in mm)

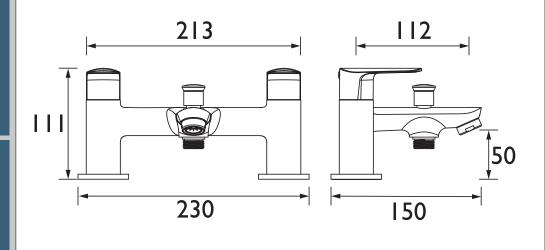

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
OPS BSM C (mixed)	15	24.4	35.6	50	62	79				
OPS BSM C (Handset)	4.2	6.7	9.9	11.7	14.4	18				

TECHNICAL DATA SHEET



BRISTAN