## COB BSM BLK



## Features:

- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend matt black finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Also available in other finishes.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

## **Product Certifications:**




WRAS Cert. Number: 2107137 WRAS Expiry Date: 31/07/2026

• 16.71/min

Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Square			
Connection Inlet:	3/4" BSP			
Connection Outlet:	Anti-Splash			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	Ν			

## Dimensions (measurements in mm)

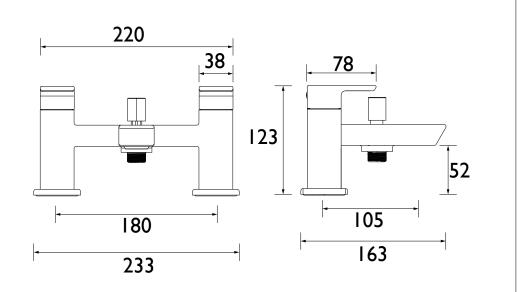

For more products, visit our website: http://www.bristan.com	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
	Through Bath Filler (mixed)	25.8	40.8	57.7	81.6	99.9	129	
E17872	Through Handset (Mixed)	4.3	6.8	9.6	13.6	16.7	21.6	
TECHNICAL DATA SHEET	NEARS LER *		B	RIS	377		D3	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.