

ST NHPUMP 20TN

Accessories 2.0bar Twin End Negative Head Shower Pump



Features:


- Suitable for domestic positive and negative head applications
- Doesn't require a gravity flow of water to start
- Twin impellar for boosting two water supplies
- Low noise-fitted with anti vibration feet
- Min inlet water temperature -4°C
- Suitable for mixer showers only

Product Certifications:



WRAS Cert Number:260608702
WRAS Expiry Date: 30/06/2031


For more products, visit our website:
<http://www.bristan.com>



Specification

Pump Type:	Peripheral
Main Construction Material:	ABS
Connection Inlet:	G 3/4"
Connection Outlet:	G 3/4"
Power Supply:	230 Volts AC
Power Consumption:	430 Watts
Motor Rating:	Continuous (S1)@ 9l/min and above
Supply:	Suitable for hot and cold open vented water systems
Inlet Temperature °C:	65
Performance:	Maximum Flow Rate 40l/min
Max Head (closed valve):	2.0 bar
Minimum Dynamic Pressure (bar):	0.1
Maximum Dynamic Pressure (bar):	4
What's in the Box?:	1x Negative Head Pump, 4x Flexible Hoses with integral isolating valves, 1.5m Power Supply Cable.

Dimensions (measurements in mm)

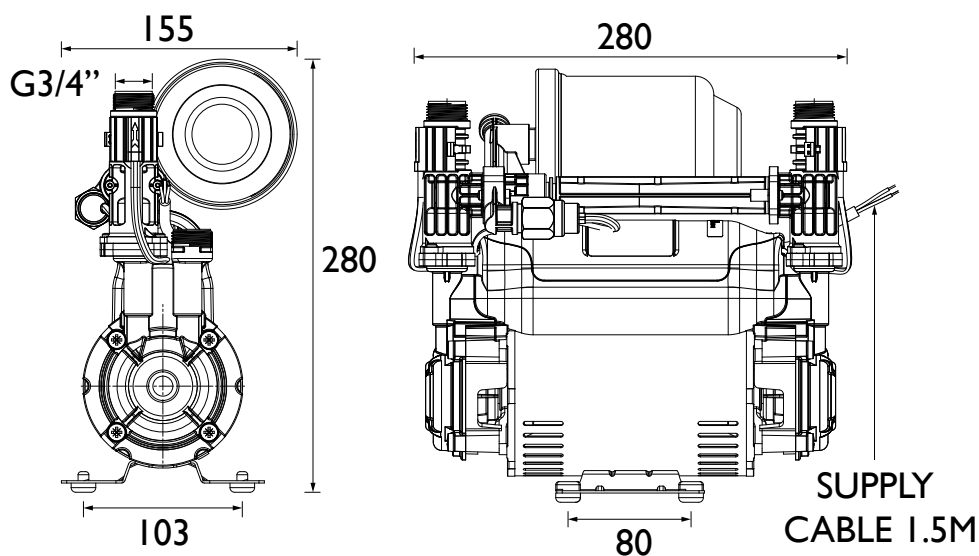

TECHNICAL
DATA
SHEET



BRISTAN

D8

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information.

The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.