## **SAFFRON** Tap Range Saffron Bath Shower Mixer Chrome

# SAF BSM C



#### Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in black and brushed brass
- Co-ordinating Bathroom taps and Recess shower available.

#### **Product Certifications:**

WRAS

APPROVED PRODUCT




Kiwa Certification No: 2312720 Kiwa E

WRAS WRAS



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Loop			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Recessed Honeycomb Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Short Stem Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

### Dimensions (measurements in mm)

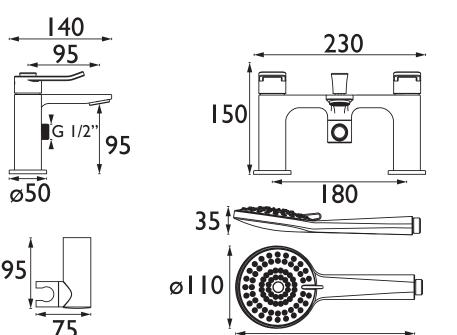

240

D3

Expiry Date: 11/12/2028								
S Certification No: 2312356	Flow Rates (l/min)							
S Expiry Date: 31/12/2028	System Pressure (bar)	0.3	0.5	1	2	3	5	
ter Label	Through Bath Filler (mixed)	9.6	15.8	23.4	33.4	40.7	52.5	
	Through Handset (mixed)	3.9	5.1	7.5	11	14	18.6	
ECHNICAL								
PATA			B	RE	57	NN		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

ARANTE

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.