

# MIO 3/4 C

## MIOS Tap Range Mios 3/4 inch Bath Taps Chrome



### Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 5 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps available.

### Product Certifications:



WRAS Certificate No: 240703010  
WRAS Expiry Date: 31/17/2029


For more products, visit our website:  
<http://www.bristan.com>



### Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Lever Handles
Connection Inlet:	G 3/4" BSP
Connection Outlet:	Housed M24 Flow Straightener
Number of Tap Holes:	2
Valve/Cartridge Type:	Ceramic Disc Valve
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	60°C
Maximum Static Pressure (bar):	10 bar
Isolation Included:	No

### Dimensions (measurements in mm)

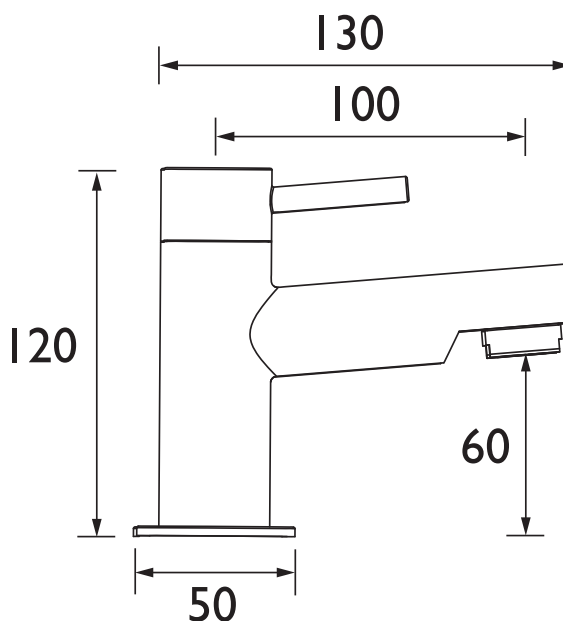

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
MIO 3/4 C (Cold)	11.4	17.6	25	34.5	42.2	54.5
MIO 3/4 C (Hot)	11.5	18	25	35.2	43.5	56.2

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

**Non-chrome product finishes carry a 3 year guarantee on finish.** See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.