SAF BSM BLK

SAFFRON Tap Range Saffron Bath Shower **Mixer Black**



Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend matt black finish to make a statement in your bathroom.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome and brushed brass.
- Co-ordinating Bathroom taps and Recess shower available.

Product Certifications:

WRAS



Kiwa Certification No: 2312720 Kiwa Expiry Date: 11/12/2028

WRAS Certification No: 2312356 WRAS Expiry Date: 31/12/2028




Sŀ




14 l/min

Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Loop				
Connection Inlet:	3/4" BSP				
Connection Outlet:	M24 Recessed Honeycomb Aerator				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Short Stem Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	60°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Dimensions (measurements in mm)

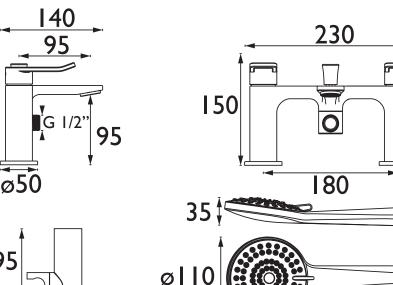



Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
Through Bath Filler (mixed)	9.6	15.8	23.4	33.4	40.7	52.5		
Through Handset (mixed)	3.9	5.1	7.5	11	14	18.6		
ROUALIA ROUALIA								
× 3 ^ 10 [^]								
CL YEARS LO CL YEARS LO					<u>nli</u>			
MANY *						D3		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.