HOU BSM BB

HOURGLASS Tap Range Hourglass Bath Shower Mixer Tap

Brushed Brass


D2




Features:


- Everything you need in the box including flexible tails so nothing to buy separately.
- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend brushed brass finish to make a statement in your bathroom.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:

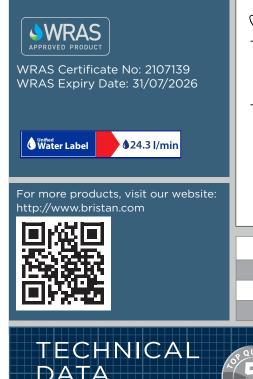

Specification				
Product Type:	Bathromm Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	G1/2"			
Number of Tap Holes:	2			
Hose Length (mm):	1500			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			



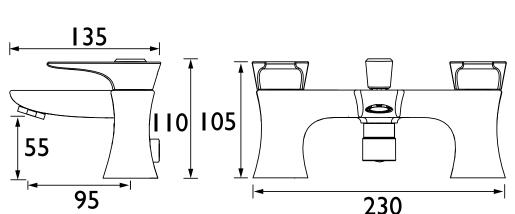

http://www.bristan.com									
	Flow Rates (I/min)								
化输送机	System Pressure (bar)	0.2	0.5	1	2	3	5		
	Through Bath Filler (mixed)	23.2	36.7	51.8	73.3	89.8	115.9		
	Through Handset (mixed)	6.3	9.9	14	19.8	24.3	31.4		
TECHNICAL DATA SHEET	or QUALIN Systems the real of QUALIN Prans		B	RIS	ST/				

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.