HOU ES BAS BLK

HOURGLASS Tap Range Hourglass Eco Start Basin Mixer Black



Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible tails and clicker/pop-up waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.


Product Certifications:



WRAS Certificate No: 2312911 WRAS Expiry Date: 31/12/2028

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever Handle			
Connection Inlet:	1/2" BSP Flexible Tails			
Connection Outlet:	M24 5lpm Flow Limiter			
Number of Tap Holes:	1			
Valve/Cartridge Type:	35mm Eco-Start Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.5 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Dimensions (measurements in mm)

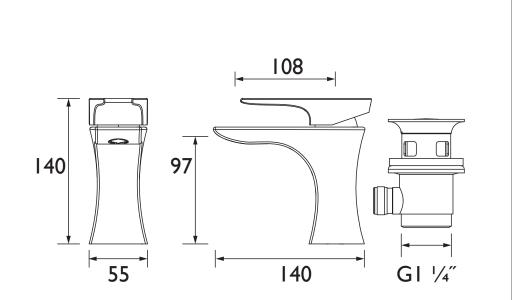

	Flow Rates (I/min)							
Water Label	System Pressure (bar)	0.5	0.5	1	2	3	5	
	HOU ES BAS BLK (mixed)	5	5	5	5	5	5	
TECHNICAL DATA SHEET		┼┼┼╂┼┼┤	B	SI S	ST/	AN	D2	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.