WOSQR BLK

SHOWER ACC Shower Square Wall Outlet Elbow Black




| Specification | |
|--|--|
| Finish/Colour: | Black |
| Main Construction Material: | ABS; Stainless Steel |
| Rub Clean Handset: | No |
| Mounting Type: | Wall |
| Plumbing System Suitability: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.2 bar |
| Maximum Dynamic Pressure (bar): | 5 bar |
| Maximum Static Pressure (bar): | 10 bar |
| Maximum Hot Water Supply Temperature °C: | 60 |
| Connection Inlet: | 1/2" BSP |
| Connection Outlet: | G 1/2" |
| Isolation Included: | No |
| Check Valve Included: | No |
| What's Included: | 1x Wall Outlet, 1x Fixings Pack, 1x Fitting Instructions |


Dimensions (measurements in mm)

Features:

- Creates a contemporary, clean look in your bathroom
- To be used in conjunction with Bristan concealed shower valves
- Used to connect a hose to a concealed shower valve
- Metal backnut for added durability
- G1/2" inlet connection

Product Certifications:

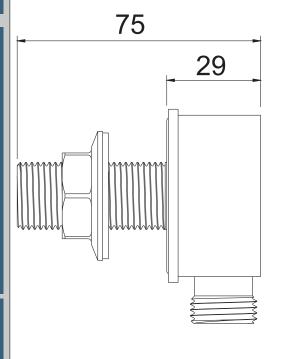

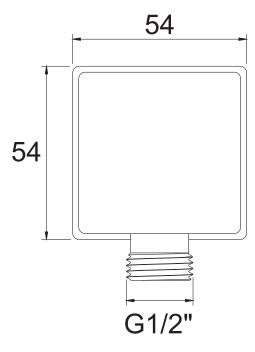

For more products, visit our website: http://www.bristan.com



TECHNICAL DATA SHEET



BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.