

BRISTAN

Installation Instructions & User Guide

Please leave these instructions with the end user

Product Code: ARM CFRD01 Range (D4)

Specifications


Dynamic Water Pressure

Min: 0.2 bar Max: 5.0 bar



Maximum Static Pressure: 10.0 bar

Inlet Water Temperature




Maximum Hot 65°C

IMPORTANT




The inlet hot water must be at least 10°C above the require blend temperature.

Inlet Connections




1/2" BSP

Pack Contents



x1 Shroud



x1 Ceiling Arm



x1 Backnut



x1 Locking Nut

Tools Required for Installation



Pipe Cutter




Pencil



Adjustable Spanner



Drill



Sealing Tape



Safety Goggles



Electronic Detector

Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of The Water Supply (Water Fittings) Regulations (Northern Ireland) 2009 and The Water Supply (Water Fittings) (Scotland) Byelaws 2014. For full Installation Requirements & Notes (IRN) please visit www.wrasapprovals.co.uk/approvals-directory

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance. Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc. Full access must be made available for future maintenance/servicing purposes.

If power tools are used do not forget to: - Wear eye protection - Unplug equipment after use

This product must not be modified in any way as this will invalidate the guarantee.

Spare Parts




To replace any spare parts for your tap, why not scan the QR Code or visit www.bristan.com and search for your product.

Installation

 PLEASE NOTE - Products shown in these instructions are for illustration purposes only. Your product can still be installed by following these instructions.


1

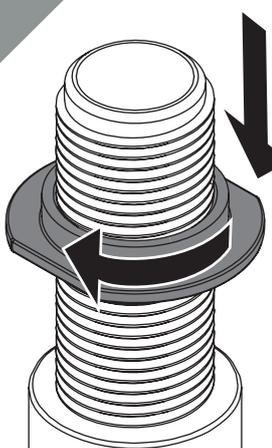

Place the locking nut onto the thread and turn until it meets the body of the arm.

2

Thread the arm through the ceiling.

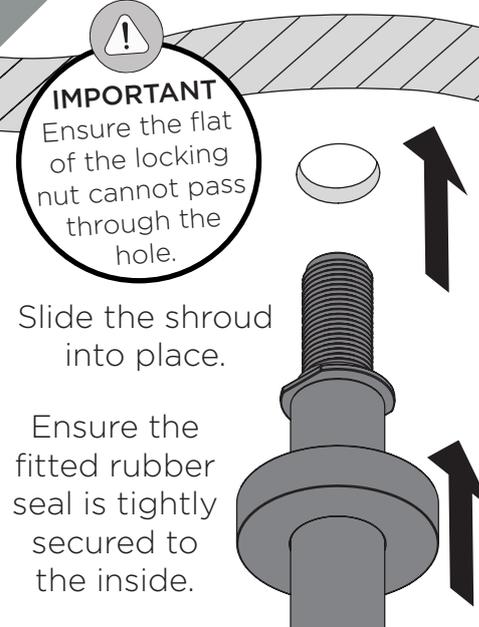

 **IMPORTANT**
Ensure the flat of the locking nut cannot pass through the hole.

Slide the shroud into place.


Ensure the fitted rubber seal is tightly secured to the inside.

3




Place the backnut onto the threaded connection.

Tighten the backnut until it is tightly secured.



3

Connect the outlet pipework to the shower arm using a suitable connector (not supplied).

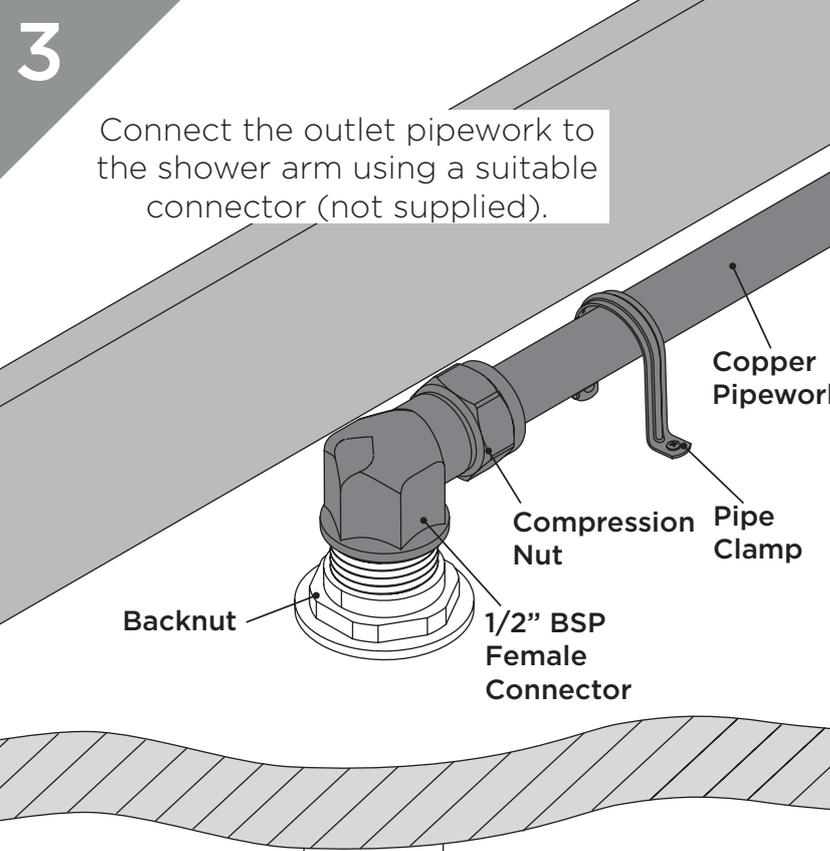

Backnut

1/2" BSP Female Connector

Compression Nut

Copper Pipework

Pipe Clamp



The supply pipework to the shower valve must be rigid and secured in position with the use of pipe clamps.

5



Connect your chosen shower head.


Turn on the water supply and check all joints and connections for any leaks.

Alternative Installation

 PLEASE NOTE - Products shown in these instructions are for illustration purposes only. Your riser outlet can still be installed by following these instructions.

1

Use a suitable sealant that is compliant with UK Water Regulations around the thread.




2

Thread the arm through the ceiling.


Slide the shroud into place.

Ensure the fitted rubber seal is tightly secured to the inside.

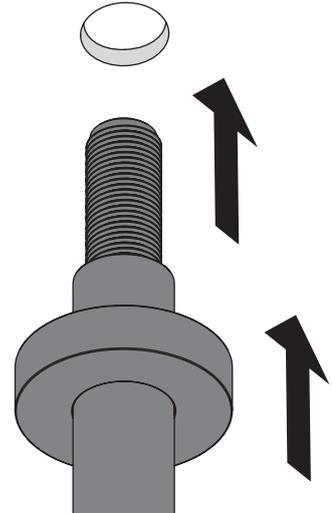

3


Connect the outlet pipework to the shower arm using a suitable connector (not supplied).

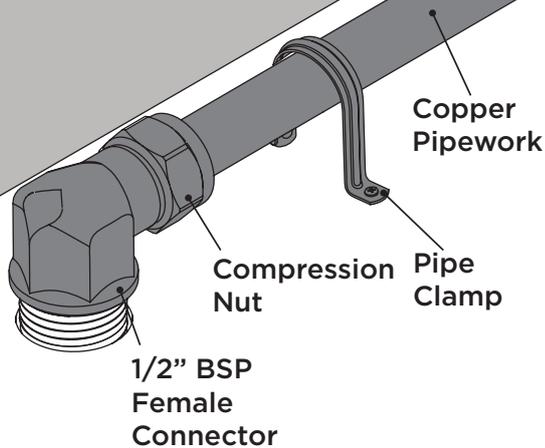

The supply pipework to the shower valve must be rigid and secured in position with the use of pipe clamps.

4

Connect your chosen shower head.

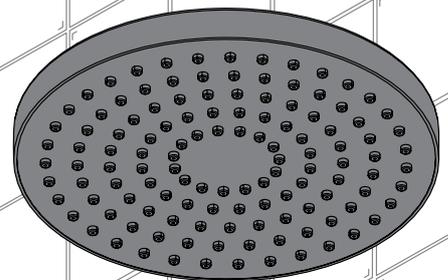

Turn on the water supply and check all joints and connections for any leaks.

Cleaning

General Cleaning

Bristan products are made from premium materials, with hand polished, PVD, EPD or electroplated finishes. Your product should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Contact Us

Bristan Group Ltd.
A Masco Company

BRISTAN

Part of **BRISTAN GROUP**

UK: Bristan Group,
Pooley Hall Drive,
Birch Coppice Business Park,
Dordon, Tamworth
B78 1SG.

EU: Masco Europe S.à.r.l.
14 Rue Strachen
6933 Mensdorf
Luxembourg

Email Us: enquire@bristan.com
Website: www.bristan.com
Call Us: +44330 026 6273

Our Guarantee

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee simply scan the QR code and register your product. Alternatively visit www.bristan.com/register.



For any other queries, please call our Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit www.bristan.com/service-centre/guarantees.