

# AL ES TBAS C

## ALTUM Tap Range Altum Eco Start Tall Basin Mixer Chrome



### Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Everything you need in the box including flexible tails.

### Product Certifications:




For more products, visit our website:  
<http://www.bristan.com>



### Specification

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product Type:                     | Bathroom Taps                     |
| Main Construction Material:       | Brass                             |
| Mount Type:                       | Deck                              |
| Handle Type:                      | Lever                             |
| Connection Inlet:                 | 1/2in BSP Flexible Tails          |
| Connection Outlet:                | M18 Aerator 5lpm Flow Limiter     |
| Number of Tap Holes:              | 1                                 |
| Valve/Cartridge Type:             | Top Seal Eco Start Cartridge      |
| Plumbing System Requirements:     | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar):   | 0.5 bar                           |
| Maximum Dynamic Pressure (bar):   | 5 bar                             |
| Maximum Hot Water Temperature °C: | 65°C                              |
| Maximum Static Pressure (bar):    | 10 bar                            |
| Flow Type:                        | Single Flow                       |
| Isolation Included:               | No                                |

### Dimensions (measurements in mm)

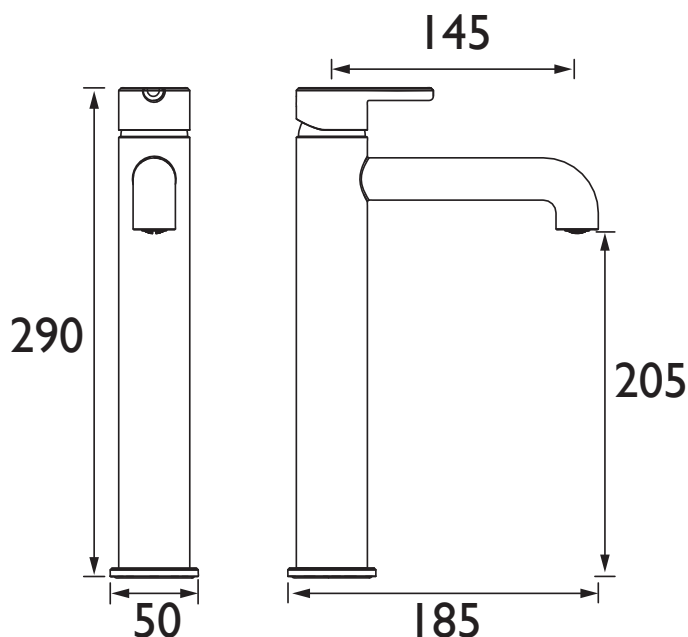

### Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1   | 2   | 3   | 4   | 5   |
|-----------------------|-----|-----|-----|-----|-----|-----|
| AL ES TBAS C (hot)    | 2.7 | 3.8 | 4.8 | 4.6 | 4.5 | 4.5 |
| AL ES TBAS C (cold)   | 2.7 | 3.9 | 4.7 | 4.5 | 4.4 | 4.5 |
| AL ES TBAS C (mixed)  | 2.6 | 3.6 | 4.6 | 4.5 | 4.5 | 4.4 |

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D1

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: [www.bristan.com](http://www.bristan.com) Telephone: 0330 026 6273. Email: [enquire@bristan.com](mailto:enquire@bristan.com).

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See [www.bristan.com/guarantees](http://www.bristan.com/guarantees) for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.